


# TIELEE®



IATF16949  
ISO9001  
ISO14001

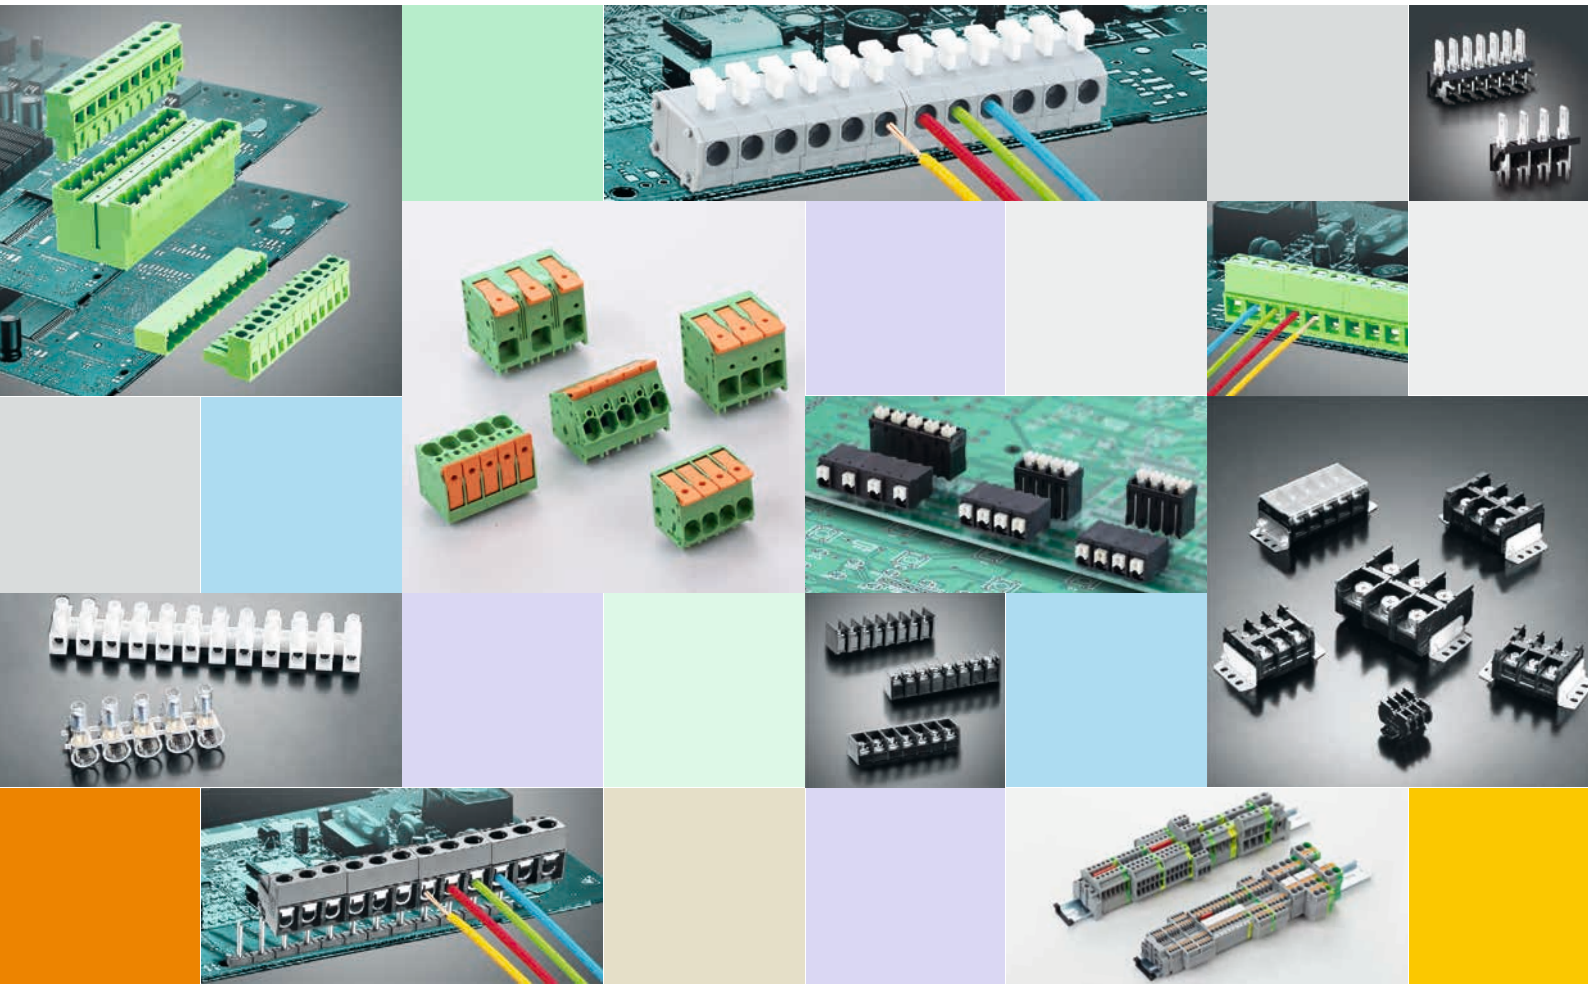

REACH



## TERMINAL BLOCKS









TC-2022









## 企业简介 Company profile

天立电机(宁波)有限公司成立于1998年,是亚洲领先的接线端子和金属零件制造商之一,为安防系统、工业自动化、电力、照明、电信、电源、轨道交通、新能源等行业的客户提供高质量的产品和服务。总部及生产基地位于宁波杭州湾新区,距上海仅2小时车程。货物运输和客户来访都相当便利。

天立已获得 ISO9001, ISO14001 和 IATF16949 管理系统认证,并拥有 UL 和 VDE 授权实验室。产品符合 RoHS 和 REACH 并获得了 , , , , ,  等认证。


为了保持进步赢得客户的青睐,天立对 CAD 设计,模具开发设备,产品注塑冲设备和员工技能培训有很大的投入。经过多年的努力,天立的销售网络涵盖全世界,并将不断为客户提供高质量的产品和专业服务,共创繁荣。

Founded in 1998, Tianli Electrical Machinery (Ningbo) Co., Ltd. is one of the leading manufacturers of terminal blocks and metal parts in Asia, providing high quality products and service to customers of security system, industrial automation, electric power, lighting, telecommunication, power supply, rail transportation, new energy and so on. The headquarter and facility is located in Hangzhou Bay New Zone, Ningbo, only 2 hours to Shanghai. The transportation is very convenient here for goods shipment & customer visiting.

Tianli has been granted ISO9001, ISO14001 and IATF16949 management system certifications and own the UL and VDE authorized laboratory. The products are approved by , , , , , , RoHS and REACH.

To keep advancement and win the favor of customers, Tianli made large investment in CAD design, mould development equipments, injection/stamping machines and staff skills training. With years of efforts, Tianli's sales network covers the whole world, and will continuously supply customers with high quality products and professional service, reaching the achievement of win-win prosperity.

04-07	TLPS SERIES - Plug(Female) for Pluggable Terminal Block
08-14	TLPH SERIES - Header(Male) for Pluggable Terminal Block
14-16	TLC SERIES - Spring-cage Clamp Terminal Block
16-18	TL SERIES - Wire Protector PCB Screw Terminal Block
19-23	TL SERIES - Raising Clamp PCB Screw Terminal Block
23-27	TLM SERIES - PCB Spring Terminal Block
27-29	TLB SERIES - Terminal Strip
29	TPK SERIES - Panel Feed-through Terminal Block
30	TLF SERIES - Fuse Terminal Block
30	FH SERIES - Fuse Holder
31	TQQ & TQS SERIES - PCB Fast Connector
32-35	B & T SERIES - Barrier Terminal Block
36-37	TB SERIES - Moldular and Rail-Mounted Terminal Block
38-43	TS & TK SERIES - Din Rail Terminal Block
44	METAL PARTS
45	CUSTOMIZED PRODUCTS

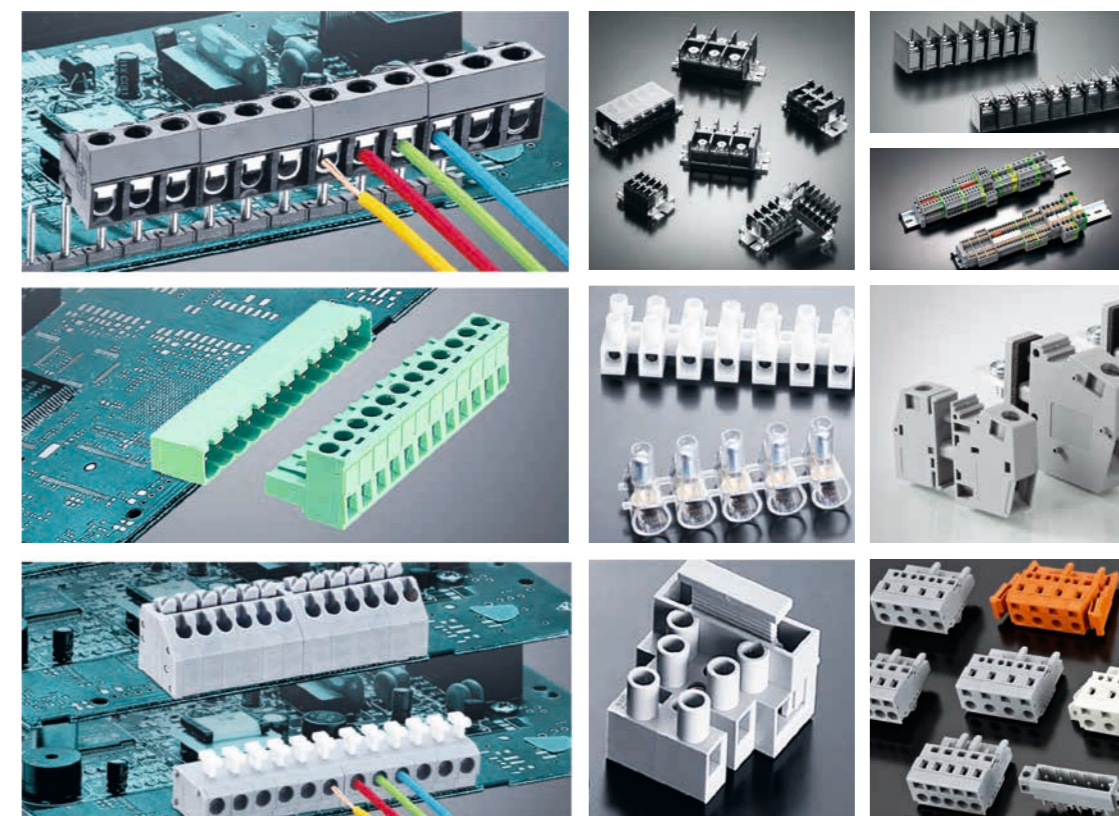





TLPH SERIES - Header(Male) for Pluggable Terminal Block

TLPH SERIES - Header(Male) for Pluggable Terminal Block



**TLPHC-006V**

Pitch (间距):	2.50mm
Approval (认证):	UL
Rated voltage (电压):	150V
Rated current (电流):	5A
Pole number (位数):	02-24P




**TLPHC-006R**

Pitch (间距):	2.50mm
Approval (认证):	UL
Rated voltage (电压):	150V
Rated current (电流):	5A
Pole number (位数):	02-24P



**TLPHC-001V(TLPHC-100V)**

Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	UL VDE
Rated voltage (电压):	300V 150V
Rated current (电流):	13A 10A
Pole number (位数):	02-24P




**TLPHW-001V(TLPHW-100V)**

Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	UL VDE
Rated voltage (电压):	300V 150V
Rated current (电流):	13A 10A
Pole number (位数):	02-24P



**TLPHC-001R(TLPHC-100R)**

Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	UL VDE
Rated voltage (电压):	300V 150V
Rated current (电流):	13A 10A
Pole number (位数):	02-24P



**TLPHW-001R(TLPHW-100R)**

Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	UL VDE
Rated voltage (电压):	300V 150V
Rated current (电流):	13A 10A
Pole number (位数):	02-24P



**TLPHC-100RL**

Pitch (间距):	3.81mm
Approval (认证):	UL VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	13A 10A
Pole number (位数):	02-24P



**TLPHW-100RL**

Pitch (间距):	3.81mm
Approval (认证):	UL VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	13A 10A
Pole number (位数):	02-24P



**TLPHL-001V(TLPHL-100VL)**

Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 160V(320V)
Rated current (电流):	13A 10A
Pole number (位数):	02-24P



**TLPHL-001R**

Pitch (间距):	3.50mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 160V
Rated current (电流):	13A 10A
Pole number (位数):	02-24P



**TLPHL-100RL**

Pitch (间距):	3.81mm
Approval (认证):	UL VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	13A 10A
Pole number (位数):	02-24P



**TLPHC-003V**

Pitch (间距):	3.50mm
Approval (认证):	UL
Rated voltage (电压):	300V 320V
Rated current (电流):	10A
Pole number (位数):	02-24P



**TLPHC-004(TLPHC-104)**

Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	UL VDE
Rated voltage (电压):	300V 160V(3.5) 320V(3.81)
Rated current (电流):	10A 10A
Pole number (位数):	02-24P



**TLPHW-004(TLPHW-104)**

Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	UL VDE
Rated voltage (电压):	300V 160V(3.5) 320V(3.81)
Rated current (电流):	10A 10A
Pole number (位数):	02-24P




**TLPH-200V(TLPH-300V)**

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	UL VDE
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



**TLPHC-200V(TLPHC-300V)**

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	UL VDE
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



**TLPHW-200V(TLPHW-300V)**

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	UL VDE
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



**TLPH-200R(TLPH-300R)**

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	UL VDE
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



**TLPHC-200R(TLPHC-300R)**

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	UL VDE
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



**TLPHW-200R(TLPHW-300R)**

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	UL VDE
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



**TLPH-200R-1603 (TLPH-300R-1603)**

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	UL VDE
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



**TLPHC-200R-1603 (TLPHC-300R-1603)**

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	UL VDE
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



**TLPHW-200R-1603 (TLPHW-300R-1603)**

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	UL VDE
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



**TLPHW-300R-0544**

Pitch (间距):	5.08mm
Approval (认证):	UL
Rated voltage (电压):	300V
Rated current (电流):	16A
Pole number (位数):	02-24P



**TLPH-225**

Pitch (间距):	5.00mm
Approval (认证):	UL
Rated voltage (电压):	300V
Rated current (电流):	15A
Pole number (位数):	02-36P



**TLPH-201R**

Pitch (间距):	5.00mm
Approval (认证):	UL VDE
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02-04P



**TLPH-201RL**

Pitch (间距):	5.00mm
Approval (认证):	UL VDE
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02-04P



**TLPHW-306**

Pitch (间距):	5.08mm
Approval (认证):	UL VDE(Applying)
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 18A
Pole number (位数):	02-24P



**TLPH-300A**

Pitch (间距):	5.08mm
Approval (认证):	UL VDE
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



**TLPHC-300A**

Pitch (间距):	5.08mm
Approval (认证):	UL VDE
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	



**TLPHW-300A**

Pitch (间距):	5.08mm
Approval (认证):	UL VDE
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



**TLPHC-313V**

Pitch (间距):	5.08mm
Approval (认证):	UL VDE
Rated voltage (电压):	300V 400V
Rated current (电流):	13A 13A
Pole number (位数):	02-24P



**TLPHW-313V**

Pitch (间距):	5.08mm
Approval (认证):	UL VDE
Rated voltage (电压):	300V 400V
Rated current (电流):	13A 13A
Pole number (位数):	02-24P



**TLPHC-313R**

Pitch (间距):	5.08mm
Approval (认证):	UL VDE
Rated voltage (电压):	300V 400V
Rated current (电流):	13A 13A
Pole number (位数):	02-24P



**TLPHW-313R**

Pitch (间距):	5.08mm
Approval (认证):	UL VDE
Rated voltage (电压):	300V 400V
Rated current (电流):	13A 13A
Pole number (位数):	02-24P



**TLPH-400V(TLPH-500V)**

Pitch (间距):	7.50mm(7.62mm)
Approval (认证):	UL VDE CE
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02-12P



**TLPHC-400V(TLPHC-500V)**

Pitch (间距):	7.50mm(7.62mm)
Approval (认证):	UL VDE
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02-12P



**TLPHW-400V(TLPHW-500V)**

Pitch (间距):	7.50mm(7.62mm)
Approval (认证):	UL VDE
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02-12P



**TLPH-400R(TLPH-500R)**


Pitch (间距):	7.50mm(7.62mm)
Approval (认证):	UL VDE
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02-12P



**TLPHC-400R(TLPHC-500R)**

Pitch (间距):	7.50mm(7.62mm)
Approval (认证):	UL VDE
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02-12P

TLPH SERIES - Header(Male) for Pluggable Terminal Block




TLPHW-400R(TLPHW-500R)

Pitch (间距): 7.50mm(7.62mm)  
Approval (认证):   
Rated voltage (电压): 300V 630V  
Rated current (电流): 16A 20A  
Pole number (位数): 02-12P




TLPH-500RL

Pitch (间距): 7.62mm  
Approval (认证):   
Rated voltage (电压): 300V 630V  
Rated current (电流): 16A 20A  
Pole number (位数): 02-12P



TLPHC-500RL

Pitch (间距): 7.62mm  
Approval (认证):   
Rated voltage (电压): 300V 630V  
Rated current (电流): 16A 20A  
Pole number (位数): 02-12P



TLPHW-500RL

Pitch (间距): 7.62mm  
Approval (认证):   
Rated voltage (电压): 300V 630V  
Rated current (电流): 16A 20A  
Pole number (位数): 02-12P



TLPHC-501V

Pitch (间距): 7.62mm  
Approval (认证):   
Rated voltage (电压): 300V 630V  
Rated current (电流): 41A 41A  
Pole number (位数): 02-16P



TLPHW-501V

Pitch (间距): 7.62mm  
Approval (认证):   
Rated voltage (电压): 300V 630V  
Rated current (电流): 41A 41A  
Pole number (位数): 02-16P




TLPHC-501R

Pitch (间距): 7.62mm  
Approval (认证):   
Rated voltage (电压): 300V 630V  
Rated current (电流): 41A 41A  
Pole number (位数): 02-16P



TLPHW-501R

Pitch (间距): 7.62mm  
Approval (认证):   
Rated voltage (电压): 300V 630V  
Rated current (电流): 41A 41A  
Pole number (位数): 02-16P



TLPHC-501RL

Pitch (间距): 7.62mm  
Approval (认证):   
Rated voltage (电压): 300V 630V  
Rated current (电流): 41A 41A  
Pole number (位数): 02-16P




TLPHW-501RL

Pitch (间距): 7.62mm  
Approval (认证):   
Rated voltage (电压): 300V 630V  
Rated current (电流): 41A 41A  
Pole number (位数): 02-16P




TLPHC-516V

Pitch (间距): 7.62mm  
Approval (认证):   
Rated voltage (电压): 300V 1000V  
Rated current (电流): 30A 32A  
Pole number (位数): 02-16P



TLPHW-516V

Pitch (间距): 7.62mm  
Approval (认证):   
Rated voltage (电压): 300V 1000V  
Rated current (电流): 30A 32A  
Pole number (位数): 02-16P



TLPHC-516R

Pitch (间距): 7.62mm  
Approval (认证):   
Rated voltage (电压): 300V 1000V  
Rated current (电流): 30A 32A  
Pole number (位数): 02-16P



TLPHW-516R

Pitch (间距): 7.62mm  
Approval (认证):   
Rated voltage (电压): 300V 1000V  
Rated current (电流): 30A 32A  
Pole number (位数): 02-16P



TLPHC-800V

Pitch (间距): 10.16mm  
Approval (认证):   
Rated voltage (电压): 300V 1000V  
Rated current (电流): 55A 76A  
Pole number (位数): 02-11P



TLPHW-800V

Pitch (间距): 10.16mm  
Approval (认证):   
Rated voltage (电压): 300V 1000V  
Rated current (电流): 55A 76A  
Pole number (位数): 02-10P



TLPHC-800R

Pitch (间距): 10.16mm  
Approval (认证):   
Rated voltage (电压): 300V 1000V  
Rated current (电流): 55A 76A  
Pole number (位数): 02-11P




TLPHW-800R

Pitch (间距): 10.16mm  
Approval (认证):   
Rated voltage (电压): 300V 1000V  
Rated current (电流): 55A 76A  
Pole number (位数): 02-10P



TLPHC-800RL


Pitch (间距): 10.16mm  
Approval (认证):   
Rated voltage (电压): 300V 1000V  
Rated current (电流): 55A 76A  
Pole number (位数): 02-11P



TLPHW-800RL

Pitch (间距): 10.16mm  
Approval (认证):   
Rated voltage (电压): 600V 1000V  
Rated current (电流): 55A 76A  
Pole number (位数): 02-10P

TLPH SERIES - Header(Male) for Pluggable Terminal Block




TLPHC-900V

Pitch (间距): 15.00mm  
Approval (认证):   
Rated voltage (电压): 600V 1000V  
Rated current (电流): 115A 125A  
Pole number (位数): 02-08P



TLPHW-900V

Pitch (间距): 15.00mm  
Approval (认证):   
Rated voltage (电压): 600V 1000V  
Rated current (电流): 115A 125A  
Pole number (位数): 02-08P



TLPHC-900R

Pitch (间距): 15.00mm  
Approval (认证):   
Rated voltage (电压): 600V 1000V  
Rated current (电流): 115A 125A  
Pole number (位数): 02-08P



TLPHW-900R

Pitch (间距): 15.00mm  
Approval (认证):   
Rated voltage (电压): 600V 1000V  
Rated current (电流): 115A 125A  
Pole number (位数): 02-08P



TLB21-002

Pitch (间距): 2.0mm (5.08mm)  
Rated voltage (电压): 50V  
Rated current (电流): 12A/3A



TLB21-004

Pitch (间距): 2.50mm (5.0mm)  
Rated voltage (电压): 150V  
Rated current (电流): 12A/5A



TLPHDC-005V(TLPHDC-105V)

Pitch (间距): 3.50mm (3.81mm)  
Approval (认证):   
Rated voltage (电压): 300V 160V(3.5) 320V(3.81)  
Rated current (电流): 10A 10A  
Pole number (位数): 04-48P



TLPHDW-005V(TLPHDW-105V)

Pitch (间距): 3.50mm (3.81mm)  
Approval (认证):   
Rated voltage (电压): 300V 160V(3.5) 320V(3.81)  
Rated current (电流): 10A 10A  
Pole number (位数): 04-48P



TLPHDC-005R(TLPHDC-105R)

Pitch (间距): 3.50mm (3.81mm)  
Approval (认证):   
Rated voltage (电压): 300V 160V(3.5) 320V(3.81)  
Rated current (电流): 10A 10A  
Pole number (位数): 04-48P




TLPHDW-005R(TLPHDW-105R)

Pitch (间距): 3.50mm (3.81mm)  
Approval (认证):   
Rated voltage (电压): 300V 160V(3.5) 320V(3.81)  
Rated current (电流): 10A 10A  
Pole number (位数): 04-48P



TLPHDC-007V

Pitch (间距): 3.50mm  
Approval (认证):   
Rated voltage (电压): 300V 160V  
Rated current (电流): 8A 10A  
Pole number (位数): 04-48P



TLPHDL-007V

Pitch (间距): 3.50mm  
Approval (认证):   
Rated voltage (电压): 300V 160V  
Rated current (电流): 8A 10A  
Pole number (位数): 04-48P



TLPHDC-007R

Pitch (间距): 3.50mm  
Approval (认证):   
Rated voltage (电压): 300V 160V  
Rated current (电流): 8A 10A  
Pole number (位数): 04-48P




TLPHDL-007R

Pitch (间距): 3.50mm  
Approval (认证):   
Rated voltage (电压): 300V 160V  
Rated current (电流): 8A 10A  
Pole number (位数): 04-48P



TLPHDC-008V(TLPHDC-108V)

Pitch (间距): 3.50mm (3.81mm)  
Approval (认证):   
Rated voltage (电压): 300V 160V(3.5) 320V(3.81)  
Rated current (电流): 8A 10A  
Pole number (位数): 04-48P



TLPHDW-008V(TLPHDW-108V)

Pitch (间距): 3.50mm (3.81mm)  
Approval (认证):   
Rated voltage (电压): 300V 160V(3.5) 320V(3.81)  
Rated current (电流): 8A 10A  
Pole number (位数): 04-48P



TLPHDC-008R(TLPHDC-108R)

Pitch (间距): 3.50mm (3.81mm)  
Approval (认证):   
Rated voltage (电压): 300V 160V(3.5) 320V(3.81)  
Rated current (电流): 8A 10A  
Pole number (位数): 04-48P




TLPHDW-008R(TLPHDW-108R)

Pitch (间距): 3.50mm (3.81mm)  
Approval (认证):   
Rated voltage (电压): 300V 160V(3.5) 320V(3.81)  
Rated current (电流): 8A 10A  
Pole number (位数): 04-48P



TLPHDC-010V

Pitch (间距): 3.50mm  
Approval (认证):   
Rated voltage (电压): 300V 160V  
Rated current (电流): 8A 10A  
Pole number (位数): 04-48P



TLPHDW-010V

Pitch (间距): 3.50mm  
Approval (认证):   
Rated voltage (电压): 300V 160V  
Rated current (电流): 8A 10A  
Pole number (位数): 04-48P

TLPH SERIES - Header(Male) for Pluggable Terminal Block




TLPHDC-010R

Pitch (间距):	3.50mm
Approval (认证):	
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Pole number (位数):	04-48P



TLPHDW-010R

Pitch (间距):	3.50mm
Approval (认证):	
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Pole number (位数):	04-48P



TLPHDC-200V(TLPHDC-300V)

Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	04-48P



TLPHDW-200V(TLPHDW-300V)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	04-48P



TLPHDC-200R(TLPHDC-300R)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	04-48P



TLPHDW-200R(TLPHDW-300R)

Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	04-48P



TLPHD-203V(TLPHD-303V)

Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	04-48P



TLPHDC-203V(TLPHDC-303V)

Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	04-48P



TLPHDW-203V(TLPHDW-303V)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	04-48P



TLPHD-203R(TLPHD-303R)

Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	04-48P



TLPHDC-203R(TLPHDC-303R)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	04-48P



TLPHDW-203R(TLPHDW-303R)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	04-48P



TLPCK-001-S

适用产品 Applicable product	TLPHC(W/L)-001 (TLPHC(W/L)-100) TLPHS-100
	TLPHC(W)-004 (TLPHC(W)-104) TLPHS (W/WA)-112
	TLPHDC(W)-005 (TLPHC(W)-105) TLPHC(W)-313
	TLPHDC(W/L)-007
	TLPHDC(W)-008 (TLPHDC(W)-108)



TLPCK-002-S

适用产品 Applicable product	TLPS(W)-200/300/400/500 TLPS(W)-201/302
	TLPS(W)-207 TLPS(W)-308
	TLPS(W)-214 TLPS(W)-309
	TLPS(W)-215/301 TLPS(W)-312
	TLPS(W)-305 TLPS(W)-502



TLPCK-003-S

适用产品 Applicable product	TLPH(C/W)-200/300/400/500
	TLPHDC(W)-200
	TLPH-201
	TLPHD(C/W)-203/303
	TLPHS(W/WA)-304
	TLPHW-306



TLPCK-004-S

适用产品 Applicable product	TLPS(W)-501 TLPS(W)-516
	TLPHC(W)-501 TLPHC(W)-516
	TLPS(W)-800
	TLPHC(W)-800



TLPCK-006-S

适用产品 Applicable product	TLPSD(W/L)-010
	TLPHDC(W)-010

TLPH SERIES - Header(Male) for Pluggable Terminal Block



TLPHC-001V-XXP-HT (TLPHC-100V-XXP-HT)

Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	13A 10A
Pole number (位数):	02-24P



TLPHL-001V-XXP-HT

Pitch (间距):	3.50mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	13A 10A
Pole number (位数):	02-24P



TLPHW-001V-XXP-HT (TLPHW-100V-XXP-HT)

Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	13A 10A
Pole number (位数):	02-24P



TLPHC-001R-XXP-HT (TLPHC-100R-XXP-HT)

Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	13A 10A
Pole number (位数):	02-24P



TLPHL-001R-XXP-HT

Pitch (间距):	3.50mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	13A 10A
Pole number (位数):	02-24P



TLPHW-001R-XXP-HT (TLPHW-100R-XXP-HT)

Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	13A 10A
Pole number (位数):	02-24P



TLPH-200V-XXP-HT (TLPH-300V-XXP-HT)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



TLPHC-200V-XXP-HT (TLPHC-300V-XXP-HT)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



TLPHW-200V-XXP-HT (TLPHW-300V-XXP-HT)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



TLPH-200R-XXP-HT (TLPH-300R-XXP-HT)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



TLPHC-200R-XXP-HT (TLPHC-300R-XXP-HT)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



TLPHW-200R-XXP-HT (TLPHW-300R-XXP-HT)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



TLPHC-313V-XXP-HT

Pitch (间距):	5.08mm
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	13A 13A
Pole number (位数):	02-24P



TLPHW-313V-XXP-HT

Pitch (间距):	5.08mm
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	13A 13A
Pole number (位数):	02-24P



TLPHC-313R-XXP-HT

Pitch (间距):	5.08mm
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	13A 13A
Pole number (位数):	02-24P



TLPHW-313R-XXP-HT

Pitch (间距):	5.08mm
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	13A 13A
Pole number (位数):	02-24P



TLPHDC-007V-XXP-HT

Pitch (间距):	3.50mm
Approval (认证):	
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Pole number (位数):	04-48P



TLPHDL-007V-XXP-HT

Pitch (间距):	3.50mm
Approval (认证):	
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Pole number (位数):	04-48P



TLPHDC-007R

Pitch (间距):	3.50mm
Approval (认证):	
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Pole number (位数):	04-48P



TLPHDL-007R-XXP-HT

Pitch (间距):	3.50mm
Approval (认证):	
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Pole number (位数):	04-48P





TLC SERIES - Spring-cage Clamp Terminal Block



**TLCPM-400A**  
Pitch (间距): 7.50mm  
Approval (认证): UL, CE  
Rated voltage (电压): 300V 630V  
Rated current (电流): 16A 16A  
Wire range (线径): 12-28AWG 0.2-2.5mm<sup>2</sup>  
Pole number (位数): 02-12P



**TLCPL-400(TLCPL-500)**  
Pitch (间距): 7.50mm (7.62mm)  
Approval (认证): UL, CE  
Rated voltage (电压): 300V 630V  
Rated current (电流): 16A 16A  
Wire range (线径): 12-28AWG 0.2-2.5mm<sup>2</sup>  
Pole number (位数): 02-12P



**TLCPL-400A**  
Pitch (间距): 7.50mm  
Approval (认证): UL, CE  
Rated voltage (电压): 300V 630V  
Rated current (电流): 16A 16A  
Wire range (线径): 12-28AWG 0.2-2.5mm<sup>2</sup>  
Pole number (位数): 02-12P



**TLCHP-003**  
Pitch (间距): 2.50mm  
Approval (认证): UL, VDE(Applying)  
Rated voltage (电压): 150V 160V  
Rated current (电流): 4A 6A  
Wire range (线径): 28-20AWG 0.2-0.5mm<sup>2</sup>  
Pole number (位数): 02-24P



**TLCPM-201**  
Pitch (间距): 5.00mm  
Approval (认证): UL(Applying)  
Rated voltage (电压): 300V  
Rated current (电流): 16A  
Wire range (线径): 22-12AWG  
Pole number (位数): 02-24P



**TLCHM-202**  
Pitch (间距): 5.00mm  
Approval (认证): UL(Applying)  
Rated voltage (电压): 300V  
Rated current (电流): 16A  
Wire range (线径): 22-12AWG  
Pole number (位数): 02-24P



**TLCP-203**  
Pitch (间距): 5.00mm  
Approval (认证): UL, VDE(Applying)  
Rated voltage (电压): 300V 320V  
Rated current (电流): 14.5A 16A  
Wire range (线径): 28-14AWG 0.2-2.5mm<sup>2</sup>  
Pole number (位数): 02-14P



**TLCH-203**  
Pitch (间距): 5.00mm  
Approval (认证): UL, VDE(Applying)  
Rated voltage (电压): 300V 320V  
Rated current (电流): 14.5A 16A  
Pole number (位数): 02-14P



**TLCP-403**  
Pitch (间距): 7.50mm  
Approval (认证): UL(Applying) VDE(Applying)  
Rated voltage (电压): 300V 630V  
Rated current (电流): 16A 16A  
Wire range (线径): 28-14AWG 0.2-2.5mm<sup>2</sup>  
Pole number (位数): 03-12P



**TLCH-403**  
Pitch (间距): 7.50mm  
Approval (认证): UL(Applying) VDE(Applying)  
Rated voltage (电压): 300V 630V  
Rated current (电流): 16A 16A  
Pole number (位数): 03-12P



**EB-5.0-01**  
Pitch (间距): 5.00mm  
Pole number (位数): 02-10P



**EB-5.0-02**  
Pitch (间距): 5.00mm  
Pole number (位数): 02-10P



**TLC-A01**  
Material (材质): PA66  
Applicable product(适用产品): TLCPL/MMW-200/300/400/500  
TLCPL/MMW-200A/400A  
TLCPL/MMW-200F/300F/400F/500F  
TLCPL/MMW-200FA/400FA



**TLC-A02**  
Material (材质): PA66  
Applicable product(适用产品): TLCP-001  
TLCP-100



**TLC-A03**  
Material (材质): PA66  
Applicable product(适用产品): TLCP-002  
TLCP-003



**TL001V(TL100V)**  
Pitch (间距): 3.50mm(3.81mm)  
Approval (认证): UL, CE  
Rated voltage (电压): 300V  
Rated current (电流): 10A  
Wire range (线径): 24-16AWG  
Pole number (位数): 02-24P



**TL001R(TL100R)**  
Pitch (间距): 3.50mm(3.81mm)  
Approval (认证): UL, CE  
Rated voltage (电压): 300V  
Rated current (电流): 10A  
Wire range (线径): 24-16AWG  
Pole number (位数): 02-24P




**TL012V**  
Pitch (间距): 3.50mm  
Approval (认证): UL, VDE(Applying)  
Rated voltage (电压): 300V 160V  
Rated current (电流): 10A 17.5A  
Wire range (线径): 26-16AWG 0.2-1.5mm<sup>2</sup>  
Pole number (位数): 02-24P



**TL012R**  
Pitch (间距): 3.50mm  
Approval (认证): UL, VDE(Applying)  
Rated voltage (电压): 300V 160V  
Rated current (电流): 10A 17.5A  
Wire range (线径): 26-16AWG 0.2-1.5mm<sup>2</sup>  
Pole number (位数): 02-24P

TL SERIES - Wire Protector PCB Screw Terminal Block

TL SERIES - Wire Protector PCB Screw Terminal Block



**TL012A**  
Pitch (间距): 3.50mm  
Approval (认证): UL, VDE(Applying)  
Rated voltage (电压): 300V 160V  
Rated current (电流): 10A 17.5A  
Wire range (线径): 26-16AWG 0.2-1.5mm<sup>2</sup>  
Pole number (位数): 02-24P



**TL012A0**  
Pitch (间距): 3.50mm  
Approval (认证): UL, VDE(Applying)  
Rated voltage (电压): 300V 160V  
Rated current (电流): 10A 13.5A  
Wire range (线径): 22-18AWG(500) 0.34-1mm<sup>2</sup>  
Pole number (位数): 02-24P



**TL200V(TL300V)**  
Pitch (间距): 5.00mm(5.08mm)  
Approval (认证): UL, CE  
Rated voltage (电压): 300V 250V  
Rated current (电流): 15A 24A  
Wire range (线径): 22-14AWG 0.5-2.5mm<sup>2</sup>  
Pole number (位数): 02-24P



**TL200R(TL300R)**  
Pitch (间距): 5.00mm(5.08mm)  
Approval (认证): UL, CE  
Rated voltage (电压): 300V 250V  
Rated current (电流): 15A 24A  
Wire range (线径): 22-14AWG 0.5-2.5mm<sup>2</sup>  
Pole number (位数): 02-24P



**TL201V(TL301V)**  
Pitch (间距): 5.00mm(5.08mm)  
Approval (认证): UL, CE (5.08mm applying)  
Rated voltage (电压): 300V 250V  
Rated current (电流): 16A 16A  
Wire range (线径): 20-14AWG 0.34-1.5mm<sup>2</sup> 2.5mm<sup>2</sup> sol  
Pole number (位数): 02-24P



**TL201R(TL301R)**  
Pitch (间距): 5.00mm(5.08mm)  
Approval (认证): UL, CE (5.08mm applying)  
Rated voltage (电压): 300V 130V  
Rated current (电流): 16A 16A  
Wire range (线径): 20-14AWG 0.34-1.5mm<sup>2</sup> 2.5mm<sup>2</sup> sol  
Pole number (位数): 02-24P



**TL202V**  
Pitch (间距): 5.00mm  
Approval (认证): UL, VDE(Applying)  
Rated voltage (电压): 300V 320V  
Rated current (电流): 16A 32A  
Wire range (线径): 22-12AWG 1.5-4mm<sup>2</sup>  
Pole number (位数): 02-24P



**TL236V**  
Pitch (间距): 5.00mm  
Approval (认证): UL, CE  
Rated voltage (电压): 300V 320V  
Rated current (电流): 20A 32A  
Wire range (线径): 20-12AWG 0.5-4mm<sup>2</sup>  
Pole number (位数): 02-24P



**TL236R**  
Pitch (间距): 5.00mm  
Approval (认证): UL, CE  
Rated voltage (电压): 300V 320V  
Rated current (电流): 20A 32A  
Wire range (线径): 20-12AWG 0.5-4mm<sup>2</sup>  
Pole number (位数): 02-24P



**TL203V**  
Pitch (间距): 5.00mm  
Approval (认证): UL, CE  
Rated voltage (电压): 300V 250V  
Rated current (电流): 16A 16A  
Wire range (线径): 26-12AWG 0.2-2.5mm<sup>2</sup>  
Pole number (位数): 02-24P



**TL226V**  
Pitch (间距): 5.00mm  
Approval (认证): UL, CE  
Rated voltage (电压): 300V 320V  
Rated current (电流): 16A 24A  
Wire range (线径): 30-12AWG 0.2-2.5mm<sup>2</sup>  
Pole number (位数): 02-24P



**TL209V**  
Pitch (间距): 5.00mm  
Approval (认证): UL, VDE(Applying)  
Rated voltage (电压): 300V 250V 320V  
Rated current (电流): 15A 24A  
Wire range (线径): 22-12AWG 0.2-2.5mm<sup>2</sup>  
Pole number (位数): 02-24P



**TL209R**  
Pitch (间距): 5.00mm  
Approval (认证): UL, VDE(Applying)  
Rated voltage (电压): 250V 320V  
Rated current (电流): 15A 24A  
Wire range (线径): 22-12AWG 0.2-2.5mm<sup>2</sup>  
Pole number (位数): 02-24P



**TL210**  
Pitch (间距): 5.00mm  
Approval (认证): UL, CE  
Rated voltage (电压): 300V  
Rated current (电流): 15A  
Wire range (线径): 22-14AWG  
Pole number (位数): 02-24P



**TL213-5.0**  
Pitch (间距): 5.00mm  
Approval (认证): UL, VDE(Applying)  
Rated voltage (电压): 300V 320V  
Rated current (电流): 20A 24A  
Wire range (线径): 24-14AWG 0.5-2.5mm<sup>2</sup>  
Pole number (位数): 02-24P



**TL216**  
Pitch (间距): 5.00mm  
Approval (认证): UL, CE  
Rated voltage (电压): 300V 450V  
Rated current (电流): 12A 12A  
Wire range (线径): 18-12AWG 0.75-4mm<sup>2</sup>  
Pole number (位数): 02-24P



**TL400V**  
Pitch (间距): 7.50mm  
Approval (认证): UL, CE  
Rated voltage (电压): 300V 450V  
Rated current (电流): 16A 24A  
Wire range (线径): 22-14AWG 0.5-2.5mm<sup>2</sup>  
Pole number (位数): 02-24P



**TL400R**  
Pitch (间距): 7.50mm  
Approval (认证): UL, CE  
Rated voltage (电压): 300V 450V  
Rated current (电流): 16A 24A  
Wire range (线径): 22-14AWG 0.5-2.5mm<sup>2</sup>  
Pole number (位数): 02-24P



**TL523**  
Pitch (间距): 7.62mm  
Approval (认证): UL, CE  
Rated voltage (电压): 300V 750V  
Rated current (电流): 35A 41A  
Wire range (线径): 30-8AWG 1-6mm<sup>2</sup>  
Pole number (位数): 02P



**TL509V**  
Pitch (间距): 7.62mm  
Approval (认证): UL, VDE(Applying)  
Rated voltage (电压): 300V 630V  
Rated current (电流): 16A 24A  
Wire range (线径): 30-12AWG 0.5-2.5mm<sup>2</sup>  
Pole number (位数): 02-16P



**TL006T**

Pitch (间距): 3.50mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V  
 Rated current (电流): 10A  
 Wire range (线径): 28-16AWG  
 Pole number (位数): 02-24P



**TL008T(HA)**

Pitch (间距): 3.50mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V 250V  
 Rated current (电流): 10A 12A  
 Wire range (线径): 26-16WG 0.2-1.5mm<sup>2</sup>  
 Screw(螺丝): M2



**TL039**

Pitch (间距): 3.50mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 150V 160V  
 Rated current (电流): 7A 10A  
 Wire range (线径): 28-16WG 0.5-1.5mm<sup>2</sup>



**TL039T**

Pitch (间距): 3.50mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 150V 160V  
 Rated current (电流): 7A 10A  
 Wire range (线径): 28-16WG 0.5-1.5mm<sup>2</sup>



**TL205T**

Pitch (间距): 5.00mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V 630V  
 Rated current (电流): 10A 11A  
 Wire range (线径): 20-14AWG 0.2-1.5mm<sup>2</sup> / 2.5mm<sup>2</sup> sol  
 Pole number (位数): 02-24P



**TL221T**

Pitch (间距): 5.00mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V 320V  
 Rated current (电流): 10A 12A  
 Wire range (线径): 20-14AWG 0.34-2.5mm<sup>2</sup>  
 Pole number (位数): 02-24P



**TL222T**

Pitch (间距): 5.0mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V 320V  
 Rated current (电流): 10A 12A  
 Wire range (线径): 24-14AWG 0.34-2.5mm<sup>2</sup>  
 Pole number (位数): 02-24P



**TL223T**

Pitch (间距): 5.00mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V  
 Rated current (电流): 12A  
 Wire range (线径): 26-12AWG  
 Pole number (位数): 02-24P



**TL235T(HA)**

Pitch (间距): 5.00mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V 630V  
 Rated current (电流): 15A 18A  
 Wire range (线径): 26-14AWG 12AWG sol 0.2-2.5mm<sup>2</sup>  
 Screw(螺丝): M2.5



**TL219**

Pitch (间距): 5.00mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V 630V  
 Rated current (电流): 12A 12A  
 Wire range (线径): 28-14AWG 0.2-1.5mm<sup>2</sup> / 2.5 sol



**TL219T**

Pitch (间距): 5.00mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V 630V  
 Rated current (电流): 12A 12A  
 Wire range (线径): 28-14AWG 0.2-1.5mm<sup>2</sup> / 2.5 sol



**TL239**

Pitch (间距): 5.00mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V 320V  
 Rated current (电流): 7A 10A  
 Wire range (线径): 28-16WG 0.5-1.5mm<sup>2</sup>



**TL239T**

Pitch (间距): 5.00mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V 320V  
 Rated current (电流): 7A 10A  
 Wire range (线径): 28-16WG 0.5-1.5mm<sup>2</sup>



**TL006P**

Pitch (间距): 3.50mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V 320V  
 Rated current (电流): 10A 12A  
 Pole number (位数): 02-24P



**TL007P**

Pitch (间距): 3.50mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V  
 Rated current (电流): 10A  
 Pole number (位数): 02-24P



**TL205P**

Pitch (间距): 5.00mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V 320V  
 Rated current (电流): 10A 18A  
 Pole number (位数): 02-24P



**TL205P-A019**

Pitch (间距): 5.00mm  
 Approval (认证): UL(Applying)  
 Rated voltage (电压): 300V  
 Rated current (电流): 10A  
 Pole number (位数): 02-24P



**TL205P-1082**

Pitch (间距): 5.0mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V  
 Rated current (电流): 10A  
 Pole number (位数): 02-24P



**TL011V**

Pitch (间距): 2.54mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 150V 160V  
 Rated current (电流): 6A 8A  
 Wire range (线径): 30-18AWG 0.2-1.0mm<sup>2</sup>  
 Pole number (位数): 02-24P



**TL002V**

Pitch (间距): 3.50mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V 130V  
 Rated current (电流): 10A 10A  
 Wire range (线径): 26-16AWG 0.2-1.5mm<sup>2</sup>  
 Pole number (位数): 02-24P



**TL003V(TL103V)**

Pitch (间距): 3.50mm(3.81mm)  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V  
 Rated current (电流): 10A  
 Wire range (线径): 26-16AWG  
 Pole number (位数): 02-24P



**TL004V(TL104V)**

Pitch (间距): 3.50mm(3.81mm)  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V  
 Rated current (电流): 10A  
 Wire range (线径): 26-16AWG  
 Pole number (位数): 02-24P



**TL004R(TL104R)**

Pitch (间距): 3.50mm(3.81mm)  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V  
 Rated current (电流): 10A  
 Wire range (线径): 26-16AWG  
 Pole number (位数): 02-24P



**TL009(TL109)**

Pitch (间距): 3.50mm(3.81mm)  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V  
 Rated current (电流): 12A  
 Wire range (线径): 30-16AWG  
 Pole number (位数): 02-24P



**TL010**

Pitch (间距): 3.50mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V  
 Rated current (电流): 10A  
 Wire range (线径): 26-16AWG  
 Pole number (位数): 02-24P



**TL204**

Pitch (间距): 5.00mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 250V 320V  
 Rated current (电流): 16A 24A  
 Wire range (线径): 26-12AWG 0.34-2.5mm<sup>2</sup>  
 Pole number (位数): 02-24P



**TL207**

Pitch (间距): 5.00mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V 320V  
 Rated current (电流): 20A 24A  
 Wire range (线径): 24-12AWG 0.2-2.5mm<sup>2</sup>  
 Pole number (位数): 02-24P



**TL231(TL331)**

Pitch (间距): 5.00mm(5.08mm)  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V 320V  
 Rated current (电流): 13.5A 15A  
 Wire range (线径): 26-14AWG 0.2-1.5mm<sup>2</sup>  
 Pole number (位数): 02-24P



**TL206V(TL306V)**

Pitch (间距): 5.00mm(5.08mm)  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V 320V  
 Rated current (电流): 20A 24A  
 Wire range (线径): 24-12AWG 0.2-2.5mm<sup>2</sup> sol / str 4mm<sup>2</sup> sol



**TL206R(TL306R)**

Pitch (间距): 5.00mm(5.08mm)  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V 320V  
 Rated current (电流): 20A 24A  
 Wire range (线径): 24-12AWG 0.2-2.5mm<sup>2</sup> sol / str 4mm<sup>2</sup> sol



**TL214V**

Pitch (间距): 5.00mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V  
 Rated current (电流): 20A  
 Wire range (线径): 24-12AWG  
 Pole number (位数): 02-24P



**TL214R**

Pitch (间距): 5.00mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V  
 Rated current (电流): 20A  
 Wire range (线径): 24-12AWG  
 Pole number (位数): 02-24P



**TL208V(TL308V)**

Pitch (间距): 5.00mm(5.08mm)  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V 320V  
 Rated current (电流): 15A 15A  
 Wire range (线径): 26-14AWG 0.34-1.5mm<sup>2</sup>  
 Pole number (位数): 02-24P



**TL215V**

Pitch (间距): 5.00mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V  
 Rated current (电流): 15A  
 Wire range (线径): 26-14AWG  
 Pole number (位数): 02-24P



**TL215R**

Pitch (间距): 5.00mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V  
 Rated current (电流): 15A  
 Wire range (线径): 26-14AWG  
 Pole number (位数): 02-24P



**TL211V**

Pitch (间距): 5.00mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V 320V  
 Rated current (电流): 25A 32A  
 Wire range (线径): 22-12AWG 0.24-4mm<sup>2</sup>  
 Pole number (位数): 02-24P



**TL211VH**

Pitch (间距): 5.00mm  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V 320V  
 Rated current (电流): 25A 32A  
 Wire range (线径): 24-12AWG 0.24-4mm<sup>2</sup>  
 Pole number (位数): 02-24P



**TL212V(TL312V)**

Pitch (间距): 5.00mm(5.08mm)  
 Approval (认证): VDE(Applying)  
 Rated voltage (电压): 300V 300V  
 Rated current (电流): 20A 20A  
 Wire range (线径): 24-12AWG 0.34-4mm<sup>2</sup>  
 Pole number (位数): 02-24P

TL SERIES - Raising Clamp PCB Screw Terminal Block

TL SERIES - Raising Clamp PCB Screw Terminal Block



TL217VA

Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	24-12AWG
Pole number (位数):	02-24P



TL217V

Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	24-12AWG
Pole number (位数):	02-24P



TL217R

Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	24-12AWG
Pole number (位数):	02-24P



TL217RA

Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	24-12AWG
Pole number (位数):	02-24P



TL220VA

Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	20A 24A
Wire range (线径):	28-12AWG 0.34-2.5mm <sup>2</sup>
Pole number (位数):	02-24P



TL220RA

Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	20A 24A
Wire range (线径):	28-12AWG 0.34-2.5mm <sup>2</sup>
Pole number (位数):	02-24P



TL220VA-00P3

Pitch (间距):	7.50mm
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	20A 24A
Wire range (线径):	28-12AWG 0.34-2.5mm <sup>2</sup>
Pole number (位数):	02-24P



TL220RA-00P3

Pitch (间距):	7.50mm
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	20A 24A
Wire range (线径):	28-12AWG 0.34-2.5mm <sup>2</sup>
Pole number (位数):	02-24P



TL225V

Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 24A
Wire range (线径):	28-12AWG 0.2-2.5mm <sup>2</sup> / 4mm <sup>2</sup> Sol
Pole number (位数):	02-24P



TL225R

Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 24A
Wire range (线径):	28-12AWG 0.2-2.5mm <sup>2</sup> / 4mm <sup>2</sup> Sol
Pole number (位数):	02-24P



TL227V

Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	20A 24A
Wire range (线径):	30-12AWG 0.2-2.5mm <sup>2</sup>
Pole number (位数):	02-24P



TL227R

Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	20A 24A
Wire range (线径):	30-12AWG 0.2-2.5mm <sup>2</sup>
Pole number (位数):	02-24P



TL333

Pitch (间距):	5.08mm
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	20A 24A
Wire range (线径):	24-12AWG 0.2-2.5mm <sup>2</sup> Sol / Str / 4mm <sup>2</sup> Sol
Pole number (位数):	02-24P



TL334

Pitch (间距):	5.08mm
Approval (认证):	
Rated voltage (电压):	300V 320V VDE(Applying)
Rated current (电流):	20A 24A
Wire range (线径):	30-12AWG 0.2-2.5mm <sup>2</sup>
Pole number (位数):	02-24P



TL901V

Pitch (间距):	6.35mm
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	30A 32A
Wire range (线径):	26-10AWG 0.5-4mm <sup>2</sup> / 6.0mm <sup>2</sup> Sol
Pole number (位数):	02-24P



TL916

Pitch (间距):	6.35mm
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	30A 32A
Wire range (线径):	28-10AWG 0.2-4mm <sup>2</sup> Sol / Str / 6.0mm <sup>2</sup> Sol
Pole number (位数):	02-24P



TL401V

Pitch (间距):	7.50mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	24-12AWG
Pole number (位数):	02-24P



TL402V(TL502V)

Pitch (间距):	7.50mm(7.62mm)
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	20A 24A
Wire range (线径):	24-12AWG 0.2-2.5mm <sup>2</sup> Sol / Str / 4mm <sup>2</sup> Sol
Pole number (位数):	02-24P



TL402R(TL502R)

Pitch (间距):	7.50mm(7.62mm)
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	20A 24A
Wire range (线径):	24-12AWG 0.2-2.5mm <sup>2</sup> Sol / Str / 4mm <sup>2</sup> Sol
Pole number (位数):	02-24P



TL403V(TL503V)

Pitch (间距):	7.50mm(7.62mm)
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	28A
Wire range (线径):	28-10AWG
Pole number (位数):	02-24P



TL403R(TL503R)

Pitch (间距):	7.50mm(7.62mm)
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	28A
Wire range (线径):	28-10AWG
Pole number (位数):	02-24P



TL414V

Pitch (间距):	7.50mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	24-12AWG
Pole number (位数):	02-16P



TL414V-1511

Pitch (间距):	7.50mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	24-12AWG
Pole number (位数):	02



TL414R

Pitch (间距):	7.50mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	24-12AWG
Pole number (位数):	02-16P



TL506V

Pitch (间距):	7.62mm
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	20A 32A
Wire range (线径):	26-10AWG 4.0mm <sup>2</sup>
Pole number (位数):	02-24P



TL606V

Pitch (间距):	9.52mm
Approval (认证):	
Rated voltage (电压):	300V 1000V
Rated current (电流):	30A 32A
Wire range (线径):	26-10AWG 0.2-6.0mm <sup>2</sup>
Pole number (位数):	02-24P



TL616

Pitch (间距):	9.52mm
Approval (认证):	
Rated voltage (电压):	300V 1000V VDE(Applying)
Rated current (电流):	30A 32A
Wire range (线径):	28-10AWG 0.2-4mm <sup>2</sup> Sol / Str / 6.0mm <sup>2</sup> Sol
Pole number (位数):	02-24P



TL800

Pitch (间距):	10.16mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	50A
Wire range (线径):	22-6AWG
Pole number (位数):	02-12P



TL802

Pitch (间距):	10.16mm
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	65A 76A
Wire range (线径):	20-6AWG 0.5-16mm <sup>2</sup>
Pole number (位数):	02-16P



TL802H

Pitch (间距):	10.16mm
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	65A 76A
Wire range (线径):	20-6AWG 0.5-16mm <sup>2</sup>
Pole number (位数):	02-16P



TL802HS

Pitch (间距):	12.70mm
Approval (认证):	
Rated voltage (电压):	600V 1000V
Rated current (电流):	65A 76A
Wire range (线径):	20-6AWG 0.5-16mm <sup>2</sup>
Pole number (位数):	02-16P



TL804

Pitch (间距):	10.16mm
Approval (认证):	
Rated voltage (电压):	600V 1000V
Rated current (电流):	65A 76A
Wire range (线径):	20-6AWG 0.5-16mm <sup>2</sup>
Pole number (位数):	02-16P



TL804S

Pitch (间距):	12.70mm
Approval (认证):	
Rated voltage (电压):	600V 1000V
Rated current (电流):	65A 76A
Wire range (线径):	20-6AWG 0.5-16mm <sup>2</sup>
Pole number (位数):	02-16P



TL804S2

Pitch (间距):	15.24mm
Approval (认证):	
Rated voltage (电压):	600V 1000V
Rated current (电流):	65A 76A
Wire range (线径):	20-6AWG 0.5-16mm <sup>2</sup>
Pole number (位数):	02-16P



TL905

Pitch (间距):	12.00mm
Approval (认证):	
Rated voltage (电压):	600V 1000V
Rated current (电流):	85A 101A
Wire range (线径):	20-4AWG 0.5-25mm <sup>2</sup>
Pole number (位数):	02-16P



TL903

Pitch (间距):	15.00mm
Approval (认证):	
Rated voltage (电压):	600V 1000V
Rated current (电流):	120A 125A
Wire range (线径):	20-2AWG 0.5-35mm <sup>2</sup>
Pole number (位数):	02-12P



TL903M

Pitch (间距):	15.00mm
Approval (认证):	
Rated voltage (电压):	600V 1000V
Rated current (电流):	120A 125A
Wire range (线径):	20-2AWG 0.5-35mm <sup>2</sup>
Pole number (位数):	02-10P



TL903ML

Pitch (间距):	15.00mm
Approval (认证):	
Rated voltage (电压):	600V 1000V
Rated current (电流):	120A 125A
Wire range (线径):	20-2AWG 0.5-35mm <sup>2</sup>
Pole number (位数):	01-10P



TL903MR

Pitch (间距):	15.00mm
Approval (认证):	
Rated voltage (电压):	600V 1000V
Rated current (电流):	120A 125A
Wire range (线径):	20-2AWG 0.5-35mm <sup>2</sup>
Pole number (位数):	01-10P























TLD001(TLD100)

Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	10A
Wire range (线径):	22-14AWG
Pole number (位数):	04-48P

























TLM SERIES - PCB Spring Terminal Block

 <b>TLM-705VA</b>	 <b>TLM-705VB</b>	 <b>TLM-705R-15.00</b>	 <b>TLM-705RA-15.00</b>
Pitch (间距): 10.00mm Approval (认证): UL(Applying) VDE(Applying) Rated voltage (电压): 600V 1000V Rated current (电流): 66A 76A Wire range (线径): 18-4AWG 0.75-25mm <sup>2</sup> Pole number (位数): 02-12P	Pitch (间距): 10.00mm Approval (认证): UL(Applying) VDE(Applying) Rated voltage (电压): 600V 1000V Rated current (电流): 66A 76A Wire range (线径): 18-4AWG 0.75-25mm <sup>2</sup> Pole number (位数): 02-12P	Pitch (间距): 15.00mm Approval (认证): UL(Applying) VDE(Applying) Rated voltage (电压): 300V 1000V Rated current (电流): 72A 76A Wire range (线径): 18-4AWG 0.75-25mm <sup>2</sup> Pole number (位数): 02-12P	Pitch (间距): 15.00mm Approval (认证): UL(Applying) VDE(Applying) Rated voltage (电压): 1000V 1000V Rated current (电流): 66A 76A Wire range (线径): 18-4AWG 0.75-25mm <sup>2</sup> Pole number (位数): 02-12P
 <b>TLM-705RB-15.00</b>	 <b>TLM-705V-15.00</b>	 <b>TLM-705VA-15.00</b>	 <b>TLM-705VB-15.00</b>
Pitch (间距): 15.00mm Approval (认证): UL(Applying) VDE(Applying) Rated voltage (电压): 1000V 1000V Rated current (电流): 66A 76A Wire range (线径): 18-4AWG 0.75-25mm <sup>2</sup> Pole number (位数): 02-12P	Pitch (间距): 15.00mm Approval (认证): UL(Applying) VDE(Applying) Rated voltage (电压): 300V 1000V Rated current (电流): 72A 76A Wire range (线径): 18-4AWG 0.75-25mm <sup>2</sup> Pole number (位数): 02-12P	Pitch (间距): 15.00mm Approval (认证): UL(Applying) VDE(Applying) Rated voltage (电压): 600V 1000V Rated current (电流): 66A 76A Wire range (线径): 18-4AWG 0.75-25mm <sup>2</sup> Pole number (位数): 02-12P	Pitch (间距): 15.00mm Approval (认证): UL(Applying) VDE(Applying) Rated voltage (电压): 600V 1000V Rated current (电流): 66A 76A Wire range (线径): 18-4AWG 0.75-25mm <sup>2</sup> Pole number (位数): 02-12P
 <b>TLM-250C(TLM-250C-9999)</b>	 <b>TLM-250D(TLM-250D-9999)</b>	 <b>TLM-002C(TLM-002C-9999)</b>	 <b>TLM-002D(TLM-002D-9999)</b>
Pitch (间距): 2.5mm(5.00mm) Approval (认证): UL VDE Rated voltage (电压): 250V 250V Rated current (电流): 2A 2A Wire range (线径): 20AWG 0.2-0.5mm <sup>2</sup> Pole number (位数): 02-24P	Pitch (间距): 2.5mm(5.00mm) Approval (认证): UL VDE Rated voltage (电压): 250V 250V Rated current (电流): 2A 2A Wire range (线径): 20AWG 0.2-0.5mm <sup>2</sup> Pole number (位数): 02-24P	Pitch (间距): 3.50mm(7.0mm) Approval (认证): UL VDE Rated voltage (电压): 300V 250V Rated current (电流): 8A 2A Wire range (线径): 28-16AWG 14AWG sol 0.5-0.75mm <sup>2</sup> Pole number (位数): 02-24P	Pitch (间距): 3.50mm(7.0mm) Approval (认证): UL VDE Rated voltage (电压): 300V 250V Rated current (电流): 8A 2A Wire range (线径): 28-16AWG 14AWG sol 0.5-0.75mm <sup>2</sup> Pole number (位数): 02-24P
 <b>TLM-900V</b>	 <b>TLM-900R</b>	 <b>TLM-300V</b>	 <b>TLM-300R</b>
Pitch (间距): 2.54mm Approval (认证): UL VDE Rated voltage (电压): 150V Rated current (电流): 2A Wire range (线径): 26-20AWG Pole number (位数): 02-24P	Pitch (间距): 2.54mm Approval (认证): UL VDE Rated voltage (电压): 150V Rated current (电流): 2A Wire range (线径): 26-20AWG Pole number (位数): 02-24P	Pitch (间距): 5.08mm Approval (认证): UL VDE Rated voltage (电压): 300V 320V Rated current (电流): 10A 17.5A Wire range (线径): 22-14AWG 0.2-1.5mm <sup>2</sup> Pole number (位数): 02-24P	Pitch (间距): 5.08mm Approval (认证): UL VDE Rated voltage (电压): 300V 320V Rated current (电流): 10A 17.5A Wire range (线径): 22-14AWG 0.2-1.5mm <sup>2</sup> Pole number (位数): 02-24P
 <b>TLM-003</b>	 <b>TLM-211</b>	 <b>TLM-210A(TLM-210A-9999)</b>	 <b>TLM-210B(TLM-210B-9999)</b>
Pitch (间距): 3.50mm Approval (认证): UL VDE(Applying) Rated voltage (电压): 300V 160V Rated current (电流): 10A 15A Wire range (线径): 26-16AWG 0.34-1.5mm <sup>2</sup> Pole number (位数): 02-24P	Pitch (间距): 5.00mm Approval (认证): UL VDE(Applying) Rated voltage (电压): 300V 320V Rated current (电流): 13.5A 17.5A Wire range (线径): 22-14AWG 0.34-1.5mm <sup>2</sup> Pole number (位数): 02-24P	Pitch (间距): 5.00mm(10.00mm) Approval (认证): UL(Applying) Rated voltage (电压): 300V Rated current (电流): 10A Wire range (线径): 22-14AWG Pole number (位数): 02-20P(02-12P)	Pitch (间距): 5.00mm(10.00mm) Approval (认证): UL(Applying) Rated voltage (电压): 300V Rated current (电流): 10A Wire range (线径): 22-14AWG Pole number (位数): 02-20P(02-12P)

TLM SERIES - PCB Spring Terminal Block

 <b>TLM-207</b>	 <b>TLM-214R</b>	 <b>TLM-201R(TLM-301R)</b>	 <b>TLM-202R(TLM-302R)</b>
Pitch (间距): 5.00mm Approval (认证): UL VDE(Applying) Rated voltage (电压): 300V 320V Rated current (电流): 10A 17.5A Wire range (线径): 20-16AWG 0.5-1.5mm <sup>2</sup> Pole number (位数): 02-24P	Pitch (间距): 5.00mm Approval (认证): UL(Applying) VDE(Applying) Rated voltage (电压): 300V 320V Rated current (电流): 8A 17.5A Wire range (线径): 26-14AWG 0.2-1.5mm <sup>2</sup> Pole number (位数): 02-24P	Pitch (间距): 5.00mm(5.08mm) Approval (认证): UL VDE Rated voltage (电压): 300V 320V Rated current (电流): 10A 24A Wire range (线径): 20-14AWG 0.2-1.5mm <sup>2</sup> Pole number (位数): 02-24P	Pitch (间距): 5.00mm(5.08mm) Approval (认证): UL VDE Rated voltage (电压): 300V 320V Rated current (电流): 10A 24A Wire range (线径): 20-14AWG 0.2-1.5mm <sup>2</sup> Pole number (位数): 02-24P
 <b>TLM-203(TLM-303)(TLM-403)</b>	 <b>TLM-203B-5.0</b>	 <b>TLM-203B-7.5</b>	 <b>TLM-203B-10.0</b>
Pitch (间距): 5.00mm(5.08mm)(7.50mm) Approval (认证): UL VDE Rated voltage (电压): 300V 320V Rated current (电流): 15A 16A Wire range (线径): 28-12AWG 2.5mm <sup>2</sup> Pole number (位数): 02-24P	Pitch (间距): 5.00mm Approval (认证): UL VDE Rated voltage (电压): 300V 320V Rated current (电流): 15A 16A Wire range (线径): 28-12AWG 0.2-2.5mm <sup>2</sup> Pole number (位数): 02-24P	Pitch (间距): 7.50mm Approval (认证): UL VDE Rated voltage (电压): 300V 630V Rated current (电流): 15A 16A Wire range (线径): 28-12AWG 0.2-2.5mm <sup>2</sup> Pole number (位数): 02-24P	Pitch (间距): 10.00mm Approval (认证): UL VDE Rated voltage (电压): 300V 1000V Rated current (电流): 15A 16A Wire range (线径): 28-12AWG 0.2-2.5mm <sup>2</sup> Pole number (位数): 02-24P
 <b>TLM-213</b>	 <b>TLM-213-7.5</b>	 <b>TLM-213-10.0</b>	 <b>TLM-304</b>
Pitch (间距): 5.00mm Approval (认证): UL VDE Rated voltage (电压): 300V 320V Rated current (电流): 16A 16A Wire range (线径): 20-12AWG 0.2-2.5mm <sup>2</sup> Pole number (位数): 02-24P	Pitch (间距): 7.50mm Approval (认证): UL VDE Rated voltage (电压): 300V 630V Rated current (电流): 16A 16A Wire range (线径): 20-12AWG 0.2-2.5mm <sup>2</sup> Pole number (位数): 02-16P	Pitch (间距): 10.00mm Approval (认证): UL VDE Rated voltage (电压): 300V 1000V Rated current (电流): 16A 16A Wire range (线径): 20-12AWG 0.2-2.5mm <sup>2</sup> Pole number (位数): 02-12P	Pitch (间距): 5.08mm Approval (认证): UL VDE Rated voltage (电压): 300V Rated current (电流): 15A Wire range (线径): 24-14AWG Pole number (位数): 02-24P
 <b>TLB-100(TLB-100H)</b>	 <b>TLB-100W(TLB-100HW)</b>	 <b>TLB-200(TLB-200H)</b>	 <b>TLB-200W(TLB-200HW)</b>
Pitch (间距): 8.00mm Approval (认证): UL VDE Rated voltage (电压): 250V 450V Rated current (电流): 20A 32A Wire range (线径): 24-12AWG 1-4mm <sup>2</sup> Pole number (位数): 01-12P	Pitch (间距): 8.00mm Approval (认证): UL VDE Rated voltage (电压): 300V 450V Rated current (电流): 20A 24A Wire range (线径): 24-14AWG 12AWG sol 0.75-2.5mm <sup>2</sup> Pole number (位数): 01-12P	Pitch (间距): 10.00mm Approval (认证): UL VDE Rated voltage (电压): 250V 450V Rated current (电流): 30A 41A Wire range (线径): 22-10AWG 2.5-6mm <sup>2</sup> Pole number (位数): 02-12P	Pitch (间距): 10.00mm Approval (认证): UL VDE Rated voltage (电压): 250V 450V Rated current (电流): 30A 32A Wire range (线径): 22-12AWG 10AWG sol 0.75-4mm <sup>2</sup> Pole number (位数): 02-12P
 <b>TLB-300(TLB-300H)</b>	 <b>TLB-300W(TLB-300HW)</b>	 <b>TLB-400</b>	 <b>TLB-400W</b>
Pitch (间距): 12.00mm Approval (认证): UL VDE Rated voltage (电压): 300V 750V Rated current (电流): 30A 57A Wire range (线径): 22-10AWG 4-6mm <sup>2</sup> 10mm <sup>2</sup> Sol Pole number (位数): 02-12P	Pitch (间距): 12.00mm Approval (认证): UL VDE Rated voltage (电压): 300V 750V Rated current (电流): 30A 41A Wire range (线径): 22-10AWG 1.5-6mm <sup>2</sup> Pole number (位数): 02-12P	Pitch (间距): 13.50mm Approval (认证): UL VDE Rated voltage (电压): 300V 750V Rated current (电流): 50A 76A Wire range (线径): 20-8AWG 6-10mm <sup>2</sup> 16mm <sup>2</sup> Sol Pole number (位数): 02-12P	Pitch (间距): 13.50mm Approval (认证): UL VDE Rated voltage (电压): 300V 750V Rated current (电流): 50A 57A Wire range (线径): 22-10AWG Sol 2.5-10mm <sup>2</sup> Pole number (位数): 02-12P

TLB SERIES - Terminal Strip



TLB-500

Pitch (间距):	14.50mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 750V
Rated current (电流):	65A 76A
Wire range (线径):	18-6AWG 6-16mm <sup>2</sup>
Pole number (位数):	01-12P



TLB-500W

Pitch (间距):	14.50mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 750V
Rated current (电流):	65A 76A
Wire range (线径):	18-6AWG 4-16mm <sup>2</sup>
Pole number (位数):	01-12P



TLB-600

Pitch (间距):	16.50mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	600V 750V
Rated current (电流):	85A 101A
Wire range (线径):	16-4AWG 4-25mm <sup>2</sup>
Pole number (位数):	02-12P



TLB-600W

Pitch (间距):	16.50mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	600V 750V
Rated current (电流):	85A 16A
Wire range (线径):	16-4AWG 4-25mm <sup>2</sup>
Pole number (位数):	02-12P



TLB-100-T(TLB-100H-T)

Pitch (间距):	8.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	250V 450V
Rated current (电流):	20A 32A
Wire range (线径):	24-12AWG 1-4mm <sup>2</sup>
Pole number (位数):	02-12P



TLB-200-T(TLB-200H-T)

Pitch (间距):	10.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	250V 450V
Rated current (电流):	30A 41A
Wire range (线径):	22-10AWG 2.5-6mm <sup>2</sup>
Pole number (位数):	02-12P



TLB-700-1P

Pitch (间距):	-
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 450V
Rated current (电流):	20A 32A
Wire range (线径):	22-12AWG 1.5-4.0mm <sup>2</sup> Sol 6mm <sup>2</sup>
Pole number (位数):	1P



TLB-700-2P

Pitch (间距):	11.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 450V
Rated current (电流):	20A 32A
Wire range (线径):	22-12AWG 1.5-4.0mm <sup>2</sup> Sol 6mm <sup>2</sup>
Pole number (位数):	2P



TLB-700-3P

Pitch (间距):	11.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 450V
Rated current (电流):	20A 32A
Wire range (线径):	22-12AWG 1.5-4.0mm <sup>2</sup> Sol 6mm <sup>2</sup>
Pole number (位数):	3P



TLB-700-4P

Pitch (间距):	11.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 450V
Rated current (电流):	20A 32A
Wire range (线径):	22-12AWG 1.5-4.0mm <sup>2</sup> Sol 6mm <sup>2</sup>
Pole number (位数):	4P



TLB-800-1P

Pitch (间距):	-
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 750V
Rated current (电流):	30A 41A
Wire range (线径):	22-10AWG 1.5-6.0mm <sup>2</sup> Sol 10mm <sup>2</sup>
Pole number (位数):	1P



TLB-800-2P

Pitch (间距):	14.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 750V
Rated current (电流):	30A 41A
Wire range (线径):	22-10AWG 1.5-6.0mm <sup>2</sup> Sol 10mm <sup>2</sup>
Pole number (位数):	2P



TLB-800-3P

Pitch (间距):	14.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 750V
Rated current (电流):	30A 41A
Wire range (线径):	22-10AWG 1.5-6.0mm <sup>2</sup> Sol 10mm <sup>2</sup>
Pole number (位数):	3P



TLB-800-4P

Pitch (间距):	14.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 750V
Rated current (电流):	30A 41A
Wire range (线径):	22-10AWG 1.5-6.0mm <sup>2</sup> Sol 10mm <sup>2</sup>
Pole number (位数):	4P



TLB-900-2P

Pitch (间距):	18.50mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	600V 750V
Rated current (电流):	50A 57A
Wire range (线径):	18-8AWG 2.5-10mm <sup>2</sup> Sol 16mm <sup>2</sup>
Pole number (位数):	2P



TLB-900-3P

Pitch (间距):	18.50mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	600V 750V
Rated current (电流):	50A 57A
Wire range (线径):	18-8AWG 2.5-10mm <sup>2</sup> Sol 16mm <sup>2</sup>
Pole number (位数):	3P



TLB-01

Approval (认证):	VDE(Applying)
Rated voltage (电压):	450V
Rated current (电流):	24A
Wire range (线径):	2.5mm <sup>2</sup>
Pole number (位数):	01-10P



TLB-02

Approval (认证):	VDE(Applying)
Rated voltage (电压):	450V
Rated current (电流):	32A
Wire range (线径):	4.0mm <sup>2</sup>
Pole number (位数):	01-10P



TLB-03

Approval (认证):	VDE(Applying)
Rated voltage (电压):	450V
Rated current (电流):	41A
Wire range (线径):	6.0mm <sup>2</sup>
Pole number (位数):	01-10P



TLB-B001-02P

Pitch (间距):	15.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	22-12AWG 0.5-4mm <sup>2</sup>
Pole number (位数):	2P



TLB-B001-04P

Pitch (间距):	15.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	22-12AWG 0.5-4mm <sup>2</sup>
Pole number (位数):	4P



TPK 4

Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 500V
Rated current (电流):	30A 32A 41A (6mm <sup>2</sup> sol)
Wire range (线径):	30-10AWG 0.2-4mm <sup>2</sup> sol / str 6mm <sup>2</sup> sol
Pole number (位数):	TPK 4



TPKV 4

Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 500V
Rated current (电流):	30A 32A 41A (6mm <sup>2</sup> sol)
Wire range (线径):	30-10AWG 0.2-4mm <sup>2</sup> sol / str 6mm <sup>2</sup> sol
Pole number (位数):	TPK 4



TPK 10

Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 500V
Rated current (电流):	65A 57A 76A (16mm <sup>2</sup> sol)
Wire range (线径):	20-6AWG 0.5-10mm <sup>2</sup> sol / str 16mm <sup>2</sup> sol
Pole number (位数):	TPK 10



TPK 10-VP

Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 500V
Rated current (电流):	65A 57A 76A (16mm <sup>2</sup> sol)
Wire range (线径):	20-6AWG 0.5-10mm <sup>2</sup> sol / str 16mm <sup>2</sup> sol
Pole number (位数):	TPK 10-VP



TPKV 10

Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 500V
Rated current (电流):	65A 57A 76A (16mm <sup>2</sup> sol)
Wire range (线径):	20-6AWG 0.5-10mm <sup>2</sup> sol / str 16mm <sup>2</sup> sol
Pole number (位数):	TPKV 10



TPKV 10-VP

Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 500V
Rated current (电流):	65A 57A 76A (16mm <sup>2</sup> sol)
Wire range (线径):	20-6AWG 0.5-10mm <sup>2</sup> sol / str 16mm <sup>2</sup> sol
Pole number (位数):	TPKV 10-VP



TPK 16

Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	85A 76A 101A (25mm <sup>2</sup> sol)
Wire range (线径):	20-4AWG 0.5-16mm <sup>2</sup> sol / str 25mm <sup>2</sup> sol
Pole number (位数):	TPK 16



TPK 16-VP

Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	85A 76A 101A (25mm <sup>2</sup> sol)
Wire range (线径):	20-4AWG 0.5-16mm <sup>2</sup> sol / str 25mm <sup>2</sup> sol
Pole number (位数):	TPK 16-VP



TPKV 16

Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	85A 76A 101A (25mm <sup>2</sup> sol)
Wire range (线径):	20-4AWG 0.5-16mm <sup>2</sup> sol / str 25mm <sup>2</sup> sol
Pole number (位数):	TPKV 16



TPKV 16-VP

Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	85A 76A 101A (25mm <sup>2</sup> sol)
Wire range (线径):	20-4AWG 0.5-16mm <sup>2</sup> sol / str 25mm <sup>2</sup> sol
Pole number (位数):	TPKV 16-VP



TPK 25

Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	115A 101A 125A (35mm <sup>2</sup> sol)
Wire range (线径):	10-2AWG 6-25mm <sup>2</sup> sol / str 35mm <sup>2</sup> sol
Pole number (位数):	TPK 25



TPK 25-VP

Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	115A 101A 125A (35mm <sup>2</sup> sol)
Wire range (线径):	10-2AWG 6-25mm <sup>2</sup> sol / str 35mm <sup>2</sup> sol
Pole number (位数):	TPK 25-VP



TPKV 25

Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	115A 101A 125A (35mm <sup>2</sup> sol)
Wire range (线径):	10-2AWG 6-25mm <sup>2</sup> sol / str 35mm <sup>2</sup> sol
Pole number (位数):	TPKV 25



TPKV 25-VP

Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	115A 101A 125A (35mm <sup>2</sup> sol)
Wire range (线径):	10-2AWG 6-25mm <sup>2</sup> sol / str 35mm <sup>2</sup> sol
Pole number (位数):	TPKV 25-VP




TLF-100-01P

Approval (认证):	UL Fuse
Rated voltage (电压):	300V 250V
Rated current (电流):	13A 6.3A
Wire range (线径):	20-14AWG 0.5-2.5mm <sup>2</sup>
Pole number (位数):	01P



TLF-100(TLF-100E/TLF-100W/TLF-100S/TLF-100EW/TLF-100SW)

Approval (认证):	UL Terminal block	UL Fuse
Rated voltage (电压):	300V 450V	300V 250V
Rated current (电流):	30A 20A(with W) 24A	13A 6.3A
Wire range (线径):	18-10AWG 18-12AWG(with W) 0.5-2.5mm <sup>2</sup>	20-14AWG 0.5-2.5mm <sup>2</sup>
Pole number (位数):	02-06P	



TLF-100-01P+TLF-100-01P

Approval (认证):	UL Fuse
Rated voltage (电压):	300V 250V
Rated current (电流):	13A 6.3A
Wire range (线径):	20-14AWG 0.5-2.5mm <sup>2</sup>
Pole number (位数):	01P+01P



TLF-100-01P+TLF-100E-05P-MS

Pitch (间距):	10.00mm	
Approval (认证):	UL Terminal block	UL Fuse
Rated voltage (电压):	300V 450V	300V 250V
Rated current (电流):	30A 24A	13A 6.3A
Wire range (线径):	18-10AWG 0.5-2.5mm <sup>2</sup>	20-14AWG 0.5-2.5mm <sup>2</sup>
Pole number (位数):	02-06P	



FH-278-A

Fuse link (保险丝):	Φ5.0*20
Approval (认证):	UL
Rated voltage (电压):	250V 250V
Rated current (电流):	10A 6.3A
Rated Power (功率):	1.6W



FH-278-NA

Fuse link (保险丝):	Φ5.0*20
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	250V 250V
Rated current (电流):	10A 6.3A
Rated Power (功率):	1.6W



FH-145-A

Fuse link (保险丝):	Φ5.0*20
Approval (认证):	UL
Rated voltage (电压):	250V 250V
Rated current (电流):	10A 10A
Rated Power (功率):	2.5W



FH-150-A

Fuse link (保险丝):	Φ5.0*20
Approval (认证):	UL
Rated voltage (电压):	250V 250V
Rated current (电流):	10A 10A
Rated Power (功率):	2.5W



TQQ-A/B/C/D/E-2.8

Approval (认证):	UL
Housing (材料):	PC UL94V0
Wire range (母端子适用线径 AWG):	18AWG
Rated Current (额定电流):	6A
Rated Voltage (额定电压):	300V AC
Pitch & poles (间距及位数):	5.08 (2P-17P) / 7.62 (2P-11P) / 10.16 (2P-9P) / 12.70 (2P-7P) / 15.24 (2P-6P)



TQQ-A/B/C/D/E-5.0

Approval (认证):	UL
Housing (材料):	PC UL94V0
Wire range (母端子适用线径 AWG):	16AWG
Rated Current (额定电流):	10A
Rated Voltage (额定电压):	300V AC
Pitch & poles (间距及位数):	5.08 (2P-17P) / 7.62 (2P-11P) / 10.16 (2P-9P) / 12.70 (2P-7P) / 15.24 (2P-6P)



TQQ-A/B/C/D/E-6.3

Approval (认证):	UL
Housing (材料):	PC UL94V0
Wire range (母端子适用线径 AWG):	14AWG
Rated Current (额定电流):	16A
Rated Voltage (额定电压):	300V AC
Pitch & poles (间距及位数):	5.08 (2P-17P) / 7.62 (2P-11P) / 10.16 (2P-9P) / 12.70 (2P-7P) / 15.24 (2P-6P)



TQQ-A/B/C/D/E-2863

Approval (认证):	UL
Housing (材料):	PC UL94V0
Wire range (母端子适用线径 AWG):	14AWG
Rated Current (额定电流):	16A
Rated Voltage (额定电压):	300V AC
Pitch & poles (间距及位数):	5.08 (2P-17P) / 7.62 (2P-11P) / 10.16 (2P-9P) / 12.70 (2P-7P) / 15.24 (2P-6P)



TQS-A/B/C/D/E-2.8

Approval (认证):	UL
Housing (材料):	PC UL94V0
Wire range (母端子适用线径 AWG):	18AWG
Rated Current (额定电流):	6A
Rated Voltage (额定电压):	300V AC
Pitch & poles (间距及位数):	5.08 (2P-17P) / 7.62 (2P-11P) / 10.16 (2P-9P) / 12.70 (2P-7P) / 15.24 (2P-6P)



TQS-A/B/C/D/E-5.0

Approval (认证):	UL
Housing (材料):	PC UL94V0
Wire range (母端子适用线径 AWG):	16AWG
Rated Current (额定电流):	10A
Rated Voltage (额定电压):	300V AC
Pitch & poles (间距及位数):	5.08 (2P-17P) / 7.62 (2P-11P) / 10.16 (2P-9P) / 12.70 (2P-7P) / 15.24 (2P-6P)



TQS-A/B/C/D/E-6.3


Approval (认证):	UL
Housing (材料):	PC UL94V0
Wire range (母端子适用线径 AWG):	14AWG
Rated Current (额定电流):	16A
Rated Voltage (额定电压):	300V AC
Pitch & poles (间距及位数):	5.08 (2P-17P) / 7.62 (2P-11P) / 10.16 (2P-9P) / 12.70 (2P-7P) / 15.24 (2P-6P)



TQS-A/B/C/D/E-2863

Approval (认证):	UL
Housing (材料):	PC UL94V0
Wire range (母端子适用线径 AWG):	14AWG
Rated Current (额定电流):	16A
Rated Voltage (额定电压):	300V AC
Pitch & poles (间距及位数):	5.08 (2P-17P) / 7.62 (2P-11P) / 10.16 (2P-9P) / 12.70 (2P-7P) / 15.24 (2P-6P)

TAB SPECIFICATION

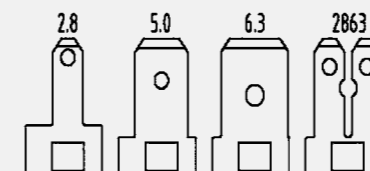




































PITCH CODE








Code/代号	A	B	C	D	E
Pitch/P距	5.08	7.62	10.16	12.70	15.24







 <p><b>TBD10-XXP</b></p> <p>Pitch (间距): 8.50mm Approval (认证):  Rated voltage (电压): 300V Rated current (电流): 10A Wire range (线径): 1.5mm<sup>2</sup> Screw(螺丝): M3 Pole number (位数): 02-12P</p>	 <p><b>TBD20-XXP</b></p> <p>Pitch (间距): 10.00mm Approval (认证):  Rated voltage (电压): 300V Rated current (电流): 20A Wire range (线径): 2.5mm<sup>2</sup> Screw(螺丝): M3.5 Pole number (位数): 02-12P</p>	 <p><b>TBD30-XXP</b></p> <p>Pitch (间距): 11.80mm Approval (认证):  Rated voltage (电压): 300V Rated current (电流): 30A Wire range (线径): 4.0mm<sup>2</sup> Screw(螺丝): M3.5 Pole number (位数): 02-12P</p>	 <p><b>TB10-XXP</b></p> <p>Pitch (间距): 8.80mm Approval (认证):  Rated voltage (电压): 600V 600V Rated current (电流): 15A Wire range (线径): 22-14AWG 1.5mm<sup>2</sup> Screw(螺丝): M3 Pole number (位数): 02-12P</p>
 <p><b>TB20-XXP</b></p> <p>Pitch (间距): 10.50mm Approval (认证):  Rated voltage (电压): 600V 600V Rated current (电流): 20A Wire range (线径): 22-12AWG 4.0mm<sup>2</sup> Screw(螺丝): M3.5 Pole number (位数): 02-12P</p>	 <p><b>TB30-XXP</b></p> <p>Pitch (间距): 13.00mm Approval (认证):  Rated voltage (电压): 600V 600V Rated current (电流): 30A Wire range (线径): 22-10AWG 6.0mm<sup>2</sup> Screw(螺丝): M4 Pole number (位数): 02-12P</p>	 <p><b>TBR10-XXP</b></p> <p>Pitch (间距): 8.80mm Approval (认证):  Rated voltage (电压): 600V Rated current (电流): 15A Wire range (线径): 22-14AWG Screw(螺丝): M3 Pole number (位数): 02-12P</p>	 <p><b>TBR20-XXP (developing)</b></p> <p>Pitch (间距): 10.50mm Approval (认证): UL(Applying) Rated voltage (电压): 600V Rated current (电流): 20A Wire range (线径): 22-12AWG Screw(螺丝): M3.5 Pole number (位数): 02-12P</p>
 <p><b>TB60-XXP</b></p> <p>Pitch (间距): 19.00mm Approval (认证):  Rated voltage (电压): 600V 600V Rated current (电流): 65A Wire range (线径): 18-6AWG 16mm<sup>2</sup> Screw(螺丝): M6 Pole number (位数): 02-12P</p>	 <p><b>TB60-1120-XXP</b></p> <p>Pitch (间距): 19.00mm Approval (认证):  Rated voltage (电压): 600V Rated current (电流): 65A Wire range (线径): 18-6AWG Screw(螺丝): M6 Pole number (位数): 02-12P</p>	 <p><b>TB80-XXP</b></p> <p>Pitch (间距): 19.00mm Approval (认证):  Rated voltage (电压): 600V 600V Rated current (电流): 85A Wire range (线径): 18-4AWG 25mm<sup>2</sup> Screw(螺丝): M6 Pole number (位数): 02-12P</p>	 <p><b>TB80-1120-XXP</b></p> <p>Pitch (间距): 19.00mm Approval (认证):  Rated voltage (电压): 600V Rated current (电流): 85A Wire range (线径): 18-4AWG Screw(螺丝): M6 Pole number (位数): 02-12P</p>
 <p><b>TB100-XXP</b></p> <p>Pitch (间距): 25.00mm Approval (认证):  Rated voltage (电压): 600V Rated current (电流): 150A Wire range (线径): 8-1/0AWG Screw(螺丝): M8 Pole number (位数): 02-12P</p>	 <p><b>TB100-1158-XXP</b></p> <p>Pitch (间距): 25.00mm Approval (认证):  Rated voltage (电压): 600V Rated current (电流): 150A Wire range (线径): 8-1/0AWG Screw(螺丝): M8 Pole number (位数): 02-12P</p>	 <p><b>TB150-XXP</b></p> <p>Pitch (间距): 27.00mm Approval (认证):  Rated voltage (电压): 600V Rated current (电流): 230A Wire range (线径): 8-4/0AWG Screw(螺丝): M8 Pole number (位数): 02-12P</p>	 <p><b>TB200-XXP</b></p> <p>Pitch (间距): 33.00mm Approval (认证):  Rated voltage (电压): 600V Rated current (电流): 230A Wire range (线径): 8-4/0AWG Screw(螺丝): M10 Pole number (位数): 02-12P</p>
 <p><b>TB300-XXP</b></p> <p>间距 Pitch 45.00mm 认证 Approval  电压 Rated Voltage 600V 电流 Rated Current 380A 线径 Applicable wire 6-3/0AWG 螺丝 Screw M10 Pole number (位数): 02-12P</p>	 <p><b>TB500-XXP</b></p> <p>间距 Pitch 60mm 认证 Approval  Rated voltage (电压): 1000V Rated current (电流): 475/620A Wire range (线径): 350-250 Kcmil Screw(螺丝): M16 Pole number (位数): 02-12P</p>		

 <p><b>TBD10D-XXP</b></p> <p>Pitch (间距): 8.50mm Approval (认证):  Rated voltage (电压): 300V Rated current (电流): 10A Wire range (线径): 1.5mm<sup>2</sup> Screw(螺丝): M3 Pole number (位数): 02-12P</p>	 <p><b>TBD20D-XXP</b></p> <p>Pitch (间距): 10.00mm Approval (认证):  Rated voltage (电压): 300V Rated current (电流): 20A Wire range (线径): 2.5mm<sup>2</sup> Screw(螺丝): M3.5 Pole number (位数): 02-12P</p>	 <p><b>TBD30D-XXP</b></p> <p>Pitch (间距): 12.00mm Approval (认证):  Rated voltage (电压): 300V Rated current (电流): 30A Wire range (线径): 4.0mm<sup>2</sup> Screw(螺丝): M3.5 Pole number (位数): 02-12P</p>	 <p><b>TB10D-XXP</b></p> <p>Pitch (间距): 8.80mm Approval (认证):  Rated voltage (电压): 600V 600V Rated current (电流): 15A Wire range (线径): 22-14AWG 1.5mm<sup>2</sup> Screw(螺丝): M3 Pole number (位数): 02-12P</p>
 <p><b>TB20D-XXP</b></p> <p>Pitch (间距): 10.50mm Approval (认证):  Rated voltage (电压): 600V 600V Rated current (电流): 20A Wire range (线径): 22-12AWG 4.0mm<sup>2</sup> Screw(螺丝): M3.5 Pole number (位数): 02-12P</p>	 <p><b>TB30D-XXP</b></p> <p>Pitch (间距): 13.00mm Approval (认证):  Rated voltage (电压): 600V 600V Rated current (电流): 30A Wire range (线径): 22-10AWG 6.0mm<sup>2</sup> Screw(螺丝): M4 Pole number (位数): 02-12P</p>	 <p><b>TB60D-XXP</b></p> <p>Pitch (间距): 19.00mm Approval (认证):  Rated voltage (电压): 600V 600V Rated current (电流): 65A Wire range (线径): 18-6AWG 16mm<sup>2</sup> Screw(螺丝): M6 Pole number (位数): 02-12P</p>	 <p><b>TB60D-1120-XXP</b></p> <p>Pitch (间距): 19.00mm Approval (认证):  Rated voltage (电压): 600V Rated current (电流): 65A Wire range (线径): 18-6AWG Screw(螺丝): M6 Pole number (位数): 02-12P</p>
 <p><b>TB80D-XXP</b></p> <p>Pitch (间距): 19.00mm Approval (认证):  Rated voltage (电压): 600V 600V Rated current (电流): 85A Wire range (线径): 18-4AWG 25mm<sup>2</sup> Screw(螺丝): M6 Pole number (位数): 02-12P</p>	 <p><b>TB80D-1120-XXP</b></p> <p>Pitch (间距): 19.00mm Approval (认证):  Rated voltage (电压): 600V Rated current (电流): 85A Wire range (线径): 18-4AWG Screw(螺丝): M6 Pole number (位数): 02-12P</p>	 <p><b>TB100D-XXP</b></p> <p>Pitch (间距): 25.00mm Approval (认证):  Rated voltage (电压): 600V Rated current (电流): 150A Wire range (线径): 8-1/0AWG Screw(螺丝): M8 Pole number (位数): 02-12P</p>	 <p><b>TB100D-1158-XXP</b></p> <p>Pitch (间距): 25.00mm Approval (认证):  Rated voltage (电压): 600V Rated current (电流): 150A Wire range (线径): 8-1/0AWG Screw(螺丝): M8 Pole number (位数): 02-12P</p>
 <p><b>TB150D-XXP</b></p> <p>Pitch (间距): 27.00mm Approval (认证):  Rated voltage (电压): 600V Rated current (电流): 230A Wire range (线径): 8-3/0AWG Screw(螺丝): M8 Pole number (位数): 02-12P</p>	 <p><b>TB200D</b></p> <p>Pitch (间距): 33.00mm Approval (认证):  Rated voltage (电压): 600V Rated current (电流): 230A Wire range (线径): 8-4/0AWG Screw(螺丝): M10 Pole number (位数): 02-12P</p>	 <p><b>TB300D-XXP</b></p> <p>Pitch (间距): 45.00mm Approval (认证):  Rated voltage (电压): 600V Rated current (电流): 380A Wire range (线径): 6-3/0AWG Screw(螺丝): M10 Pole number (位数): 02-12P</p>	 <p><b>TB500D-XXP</b></p> <p>Pitch (间距): 60.00mm Approval (认证):  Rated voltage (电压): 1000V Rated current (电流): 620A Wire range (线径): 350-250 Kcmil Screw(螺丝): M16 Pole number (位数): 02-12P</p>
 <p><b>TBR10D-XXP</b></p> <p>Pitch (间距): 8.80mm Approval (认证):  Rated voltage (电压): 600V Rated current (电流): 15A Wire range (线径): 22-14AWG Screw(螺丝): M3 Pole number (位数): 02-12P</p>	 <p><b>TBR20D-XXP (developing)</b></p> <p>Pitch (间距): 10.50mm Approval (认证): UL(Applying) Rated voltage (电压): 600V Rated current (电流): 20A Wire range (线径): 22-12AWG Screw(螺丝): M3.5 Pole number (位数): 02-12P</p>		



TS1.5

Thickness(厚度)	3.50mm
Approval(认证)	UL(Applying) VDE(Applying)
Rated voltage(电压)	300V 500V
Rated current(电流)	15A 17.5A
Wire range(线径)	26-14AWG 0.2-1.5mm <sup>2</sup>



TS2.5

Thickness(厚度)	5.20mm
Approval(认证)	UL(Applying) VDE(Applying)
Rated voltage(电压)	600V 800V
Rated current(电流)	20A 24A
Wire range(线径)	26-12AWG 0.2-2.5mm <sup>2</sup> 4mm <sup>2</sup> Sol



TS4

Thickness(厚度)	6.20mm
Approval(认证)	UL(Applying) VDE(Applying)
Rated voltage(电压)	600V 1000V
Rated current(电流)	30A 32A
Wire range(线径)	24-10AWG 0.2-4mm <sup>2</sup> 6mm <sup>2</sup> Sol



TS6

Thickness(厚度)	8.20mm
Approval(认证)	UL(Applying) VDE(Applying)
Rated voltage(电压)	600V 1000V
Rated current(电流)	40A 41A
Wire range(线径)	20-8AWG 0.5-6mm <sup>2</sup> 10mm <sup>2</sup> Sol




TS10

Thickness(厚度)	10.20mm
Approval(认证)	UL(Applying) VDE(Applying)
Rated voltage(电压)	600V 1000V
Rated current(电流)	60A 57A
Wire range(线径)	20-6AWG 0.5-10mm <sup>2</sup> 16mm <sup>2</sup> Sol



NO IMAGE  
TS16

Thickness(厚度)	12.20mm
Approval(认证)	UL(Applying) VDE(Applying)
Rated voltage(电压)	600V 1000V
Rated current(电流)	85A 76A
Wire range(线径)	20-4AWG 0.5-16mm <sup>2</sup> 25mm <sup>2</sup> Sol



TS1.5-PE

Thickness(厚度)	3.50mm
Approval(认证)	UL(Applying) VDE(Applying)
Wire range(线径)	26-14AWG 0.2-1.5mm <sup>2</sup>



TS2.5-PE

Thickness(厚度)	5.20mm
Approval(认证)	UL(Applying) VDE(Applying)
Wire range(线径)	26-12AWG 0.2-2.5mm <sup>2</sup> 4mm <sup>2</sup> Sol



TS4-PE

Thickness(厚度)	6.20mm
Approval(认证)	UL(Applying) VDE(Applying)
Wire range(线径)	24-10AWG 0.2-4mm <sup>2</sup> 6mm <sup>2</sup> Sol




TS6-PE

Thickness(厚度)	8.20mm
Approval(认证)	UL(Applying) VDE(Applying)
Wire range(线径)	20-8AWG 0.5-6mm <sup>2</sup> 10mm <sup>2</sup> Sol



TS10-PE

Thickness(厚度)	10.20mm
Approval(认证)	UL(Applying) VDE(Applying)
Wire range(线径)	20-6AWG 0.5-10mm <sup>2</sup> 16mm <sup>2</sup> Sol



NO IMAGE  
TS16-PE

Thickness(厚度)	12.20mm
Approval(认证)	UL(Applying) VDE(Applying)
Wire range(线径)	20-4AWG 0.5-16mm <sup>2</sup> 25mm <sup>2</sup> Sol



TSC1.5

Applicable product(适用产品)	TS1.5, TS1.5-PE
--------------------------	-----------------



TSC2.5

Applicable product(适用产品)	TS2.5, TS2.5-PE
--------------------------	-----------------



TSC4

Applicable product(适用产品)	TS4, TS4-PE
--------------------------	-------------



TSC6

Applicable product(适用产品)	TS6, TS6-PE
--------------------------	-------------



TSC10

Applicable product(适用产品)	TS10, TS10-PE
--------------------------	---------------



NO IMAGE  
TSC16

Applicable product(适用产品)	TS16, TS16-PE
--------------------------	---------------




TS1.5-TN

Thickness(厚度)	3.50mm
Approval(认证)	UL(Applying) VDE(Applying)
Rated voltage(电压)	300V 500V
Rated current(电流)	15A 17.5A
Wire range(线径)	26-14AWG 0.2-1.5mm <sup>2</sup>



TS2.5-TN

Thickness(厚度)	5.20mm
Approval(认证)	CUL(Applying) VDE(Applying)
Rated voltage(电压)	600V 800V
Rated current(电流)	20A 24A
Wire range(线径)	26-12AWG 0.2-2.5mm <sup>2</sup> 4mm <sup>2</sup> Sol




TS4-TN

Thickness(厚度)	6.20mm
Approval(认证)	UL(Applying) VDE(Applying)
Rated voltage(电压)	600V 1000V
Rated current(电流)	30A 32A
Wire range(线径)	24-10AWG 0.2-4mm <sup>2</sup> 6mm <sup>2</sup> Sol



TS6-TN

Thickness(厚度)	8.20mm
Approval(认证)	UL(Applying) VDE(Applying)
Rated voltage(电压)	600V 1000V
Rated current(电流)	40A 41A
Wire range(线径)	20-8AWG 0.5-6mm <sup>2</sup> 10mm <sup>2</sup> Sol



TS10-TN

Thickness(厚度)	10.20mm
Approval(认证)	UL(Applying) VDE(Applying)
Rated voltage(电压)	600V 1000V
Rated current(电流)	60A 57A
Wire range(线径)	20-6AWG 0.5-10mm <sup>2</sup> 16mm <sup>2</sup> Sol



TS1.5-TN-PE

Thickness(厚度)	3.50mm
Approval(认证)	UL(Applying) VDE(Applying)
Rated voltage(电压)	300V 500V
Rated current(电流)	15A 17.5A
Wire range(线径)	26-14AWG 0.2-1.5mm <sup>2</sup>



TS2.5-TN-PE

Thickness(厚度)	5.20mm
Approval(认证)	CUL(Applying) VDE(Applying)
Wire range(线径)	26-12AWG 0.2-2.5mm <sup>2</sup> 4mm <sup>2</sup> Sol



TS4-TN-PE

Thickness(厚度)	6.20mm
Approval(认证)	UL(Applying) VDE(Applying)
Wire range(线径)	24-10AWG 0.2-4mm <sup>2</sup> 6mm <sup>2</sup> Sol



TS6-TN-PE

Thickness(厚度)	8.20mm
Approval(认证)	UL(Applying) VDE(Applying)
Wire range(线径)	20-8AWG 0.5-6mm <sup>2</sup> 10mm <sup>2</sup> Sol



TS10-TN-PE

Thickness(厚度)	10.20mm
Approval(认证)	UL(Applying) VDE(Applying)
Wire range(线径)	20-6AWG 0.5-10mm <sup>2</sup> 16mm <sup>2</sup> Sol



TSC1.5-TN

Applicable product(适用产品)	TS1.5-TN, TS1.5-TN-PE
--------------------------	-----------------------



TSC2.5-TN

Applicable product(适用产品)	TS2.5-TN, TS2.5-TN-PE
--------------------------	-----------------------



TSC4-TN

Applicable product(适用产品)	TS4-TN, TS4-TN-PE
--------------------------	-------------------



TSC6-TN

Applicable product(适用产品)	TS6-TN, TS6-TN-PE
--------------------------	-------------------



TSC10-TN

Applicable product(适用产品)	TS10-TN, TS10-TN-PE
--------------------------	---------------------




TS1.5-QT

Thickness(厚度)	3.50mm
Approval(认证)	UL(Applying) VDE(Applying)
Rated voltage(电压)	300V 500V
Rated current(电流)	15A 17.5A
Wire range(线径)	26-14AWG 0.2-1.5mm <sup>2</sup>




TS2.5-QT

Thickness(厚度)	5.20mm
Approval(认证)	CUL(Applying) VDE(Applying)
Rated voltage(电压)	600V 800V
Rated current(电流)	20A 24A
Wire range(线径)	26-12AWG 0.2-2.5mm <sup>2</sup> 4mm <sup>2</sup> Sol

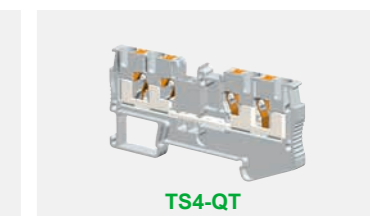

TS4-QT

Thickness(厚度)	6.20mm
Approval(认证)	UL(Applying) VDE(Applying)
Rated voltage(电压)	600V 1000V
Rated current(电流)	30A 32A
Wire range(线径)	24-10AWG 0.2-4mm <sup>2</sup> 6mm <sup>2</sup> Sol




TS6-QT

Thickness(厚度)	8.20mm
Approval(认证)	UL(Applying) VDE(Applying)
Rated voltage(电压)	600V 1000V
Rated current(电流)	40A 41A
Wire range(线径)	20-8AWG 0.5-6mm <sup>2</sup> 10mm <sup>2</sup> Sol



TS1.5-QT-PE

Thickness(厚度)	3.50mm
Approval(认证)	UL(Applying) VDE(Applying)
Wire range(线径)	26-14AWG 0.2-1.5mm <sup>2</sup>



TS2.5-QT-PE

Thickness(厚度)	6.20mm
Approval(认证)	UL(Applying) VDE(Applying)
Wire range(线径)	26-12AWG 0.2-2.5mm <sup>2</sup> 4mm <sup>2</sup> Sol



TS4-QT-PE

Thickness(厚度)	6.20mm
Approval(认证)	UL(Applying) VDE(Applying)
Wire range(线径)	24-10AWG 0.2-4mm <sup>2</sup> 6mm <sup>2</sup> Sol



TS6-QT-PE

Thickness (厚度): 8.20mm  
Approval (认证): UL(Applying) VDE(Applying)  
Wire range (线径): 20-8AWG 0.5-6mm<sup>2</sup> 10mm<sup>2</sup> Sol



TSC1.5-QT

Applicable product (适用产品)  
TS1.5-QT, TS1.5-QT-PE



TSC2.5-QT

Applicable product (适用产品)  
TS2.5-QT, TS2.5-QT-PE




TSC4-QT

Applicable product (适用产品)  
TS4-QT, TS4-QT-PE



TSC6-QT

Applicable product (适用产品)  
TS6-QT, TS6-QT-PE




TS1.5-2L

Thickness (厚度): 3.50mm  
Approval (认证): UL(Applying) VDE(Applying)  
Rated voltage (电压): 300V 500V  
Rated current (电流): 15A 16A  
Wire range (线径): 26-14AWG 0.2-1.5mm<sup>2</sup>



TS2.5-2L

Thickness (厚度): 5.20mm  
Approval (认证): UL(Applying) VDE(Applying)  
Rated voltage (电压): 300V 500V  
Rated current (电流): 20A 22A  
Wire range (线径): 26-12AWG 0.2-2.5mm<sup>2</sup> 4mm<sup>2</sup> Sol



TS4-2L

Thickness (厚度): 6.20mm  
Approval (认证): UL(Applying) VDE(Applying)  
Rated voltage (电压): 300V 500V  
Rated current (电流): 30A 28A  
Wire range (线径): 24-10AWG 0.2-4mm<sup>2</sup> 6mm<sup>2</sup> Sol



TS1.5-2L-PE

Thickness (厚度): 3.50mm  
Approval (认证): UL(Applying) VDE(Applying)  
Wire range (线径): 26-14AWG 0.2-1.5mm<sup>2</sup>



TS2.5-2L-PE

Thickness (厚度): 5.20mm  
Approval (认证): UL(Applying) VDE(Applying)  
Wire range (线径): 26-12AWG 0.2-2.5mm<sup>2</sup> 4mm<sup>2</sup> Sol



TS4-2L-PE

Thickness (厚度): 6.20mm  
Approval (认证): UL(Applying) VDE(Applying)  
Wire range (线径): 24-10AWG 0.2-4mm<sup>2</sup> 6mm<sup>2</sup> Sol



TS1.5-2L-PV

Thickness (厚度): 3.50mm  
Approval (认证): UL(Applying) VDE(Applying)  
Rated voltage (电压): 300V 500V  
Rated current (电流): 15A 16A  
Wire range (线径): 26-14AWG 0.2-1.5mm<sup>2</sup>



TS2.5-2L-PV

Thickness (厚度): 5.20mm  
Approval (认证): UL(Applying) VDE(Applying)  
Rated voltage (电压): 300V 500V  
Rated current (电流): 20A 22A  
Wire range (线径): 26-12AWG 0.2-2.5mm<sup>2</sup> 4mm<sup>2</sup> Sol



TSC1.5-2L

Applicable product (适用产品)  
TS1.5-2L, TS1.5-2L-PE



TSC2.5-2L

Applicable product (适用产品)  
TS2.5-2L, TS2.5-2L-PE



TSC4-2L

Applicable product (适用产品)  
TS4-2L, TS4-2L-PE



ETNS01

Thickness (厚度): 8.00mm  
Applicable Din Rail(适用的导轨)  
TH35-7.5, TH35-15



ETNS03

Thickness (厚度): 5.15mm  
Applicable Din Rail(适用的导轨)  
TH35-7.5, TH35-15



TK2.5

Thickness (厚度): 5.20mm  
Approval (认证): UL(Applying) VDE(Applying)  
Rated voltage (电压): 600V 1000V  
Rated current (电流): 20A 24A  
Wire range (线径): 26-12AWG 0.2-2.5mm<sup>2</sup> 4mm<sup>2</sup> Sol  
Screw (螺丝): M3



TK4

Thickness (厚度): 6.20mm  
Approval (认证): UL(Applying) VDE(Applying)  
Rated voltage (电压): 600V 1000V  
Rated current (电流): 30A 32A  
Wire range (线径): 26-10AWG 0.2-4mm<sup>2</sup> 6mm<sup>2</sup> Sol  
Screw (螺丝): M3



TK6

Thickness (厚度): 8.20mm  
Approval (认证): UL(Applying) VDE(Applying)  
Rated voltage (电压): 600V 1000V  
Rated current (电流): 50A 41A  
Wire range (线径): 24-8AWG 0.2-6mm<sup>2</sup> 10mm<sup>2</sup> Sol  
Screw (螺丝): M4




TK10

Thickness (厚度): 10.20mm  
Approval (认证): UL(Applying) VDE(Applying)  
Rated voltage (电压): 600V 1000V  
Rated current (电流): 65A 57A  
Wire range (线径): 26-6AWG 0.5-10mm<sup>2</sup> 16mm<sup>2</sup> Sol  
Screw (螺丝): M4



TK16

Thickness (厚度): 12.20mm  
Approval (认证): UL(Applying) VDE(Applying)  
Rated voltage (电压): 600V 1000V  
Rated current (电流): 100A 76A  
Wire range (线径): 16-3AWG 1.5-25mm<sup>2</sup>  
Screw (螺丝): M5



TK35

Thickness (厚度): 16.00mm  
Approval (认证): UL(Applying) VDE(Applying)  
Rated voltage (电压): 600V 1000V  
Rated current (电流): 150A 125A  
Wire range (线径): 14-1/0AWG 2.5-50mm<sup>2</sup>  
Screw (螺丝): M6



TK2.5-PE

Thickness (厚度): 5.20mm  
Approval (认证): UL(Applying) VDE(Applying)  
Wire range (线径): 26-12AWG 0.2-2.5mm<sup>2</sup> 4mm<sup>2</sup> Sol  
Screw (螺丝): M3



TK4-PE

Thickness (厚度): 6.20mm  
Approval (认证): UL(Applying) VDE(Applying)  
Wire range (线径): 26-12AWG 0.2-4mm<sup>2</sup> 6mm<sup>2</sup> Sol  
Screw (螺丝): M3



TK6-PE

Thickness (厚度): 8.20mm  
Approval (认证): UL(Applying) VDE(Applying)  
Wire range (线径): 24-8AWG 0.2-6mm<sup>2</sup> 10mm<sup>2</sup> Sol  
Screw (螺丝): M4




TK10-PE

Thickness (厚度): 10.20mm  
Approval (认证): UL(Applying) VDE(Applying)  
Wire range (线径): 20-6AWG 0.5-10mm<sup>2</sup> 16mm<sup>2</sup> Sol  
Screw (螺丝): M4



TK16-PE

Thickness (厚度): 12.20mm  
Approval (认证): UL(Applying) VDE(Applying)  
Wire range (线径): 16-3AWG 1.5-25mm<sup>2</sup>  
Screw (螺丝): M5



TK35-PE

Thickness (厚度): 16.00mm  
Approval (认证): UL(Applying) VDE(Applying)  
Wire range (线径): 14-1/0AWG 2.5-50mm<sup>2</sup>  
Screw (螺丝): M6



TKC2.5-10

Applicable product (适用产品)  
TK2.5, TK2.5-PE  
TK4, TK4-PE  
TK6, TK6-PE  
TK10, TK10-PE



TKC16

Applicable product (适用产品)  
TK16, TK16-PE



TK2.5-TN

Thickness (厚度): 5.20mm  
Approval (认证): UL(Applying) VDE(Applying)  
Rated voltage (电压): 600V 1000V  
Rated current (电流): 20A 24A  
Wire range (线径): 26-12AWG 0.2-2.5mm<sup>2</sup> 4mm<sup>2</sup> Sol  
Screw (螺丝): M3



TK4-TN

Thickness (厚度): 6.20mm  
Approval (认证): UL(Applying) VDE(Applying)  
Rated voltage (电压): 600V 1000V  
Rated current (电流): 30A 32A  
Wire range (线径): 26-10AWG 0.2-4mm<sup>2</sup> 6mm<sup>2</sup> Sol  
Screw (螺丝): M3



TK6-TN

Thickness (厚度): 8.20mm  
Approval (认证): UL(Applying) VDE(Applying)  
Rated voltage (电压): 600V 1000V  
Rated current (电流): 50A 41A  
Wire range (线径): 24-8AWG 0.2-6mm<sup>2</sup> 10mm<sup>2</sup> Sol  
Screw (螺丝): M4



TK10-TN

Thickness (厚度): 10.20mm  
Approval (认证): UL(Applying) VDE(Applying)  
Rated voltage (电压): 600V 1000V  
Rated current (电流): 65A 57A  
Wire range (线径): 20-6AWG 0.5-10mm<sup>2</sup> 16mm<sup>2</sup> Sol  
Screw (螺丝): M4



TK2.5-TN-PE

Thickness (厚度): 5.20mm  
Approval (认证): UL(Applying) VDE(Applying)  
Wire range (线径): 26-12AWG 0.2-2.5mm<sup>2</sup> 4mm<sup>2</sup> Sol  
Screw (螺丝): M3



TK4-TN-PE

Thickness (厚度): 6.20mm  
Approval (认证): UL(Applying) VDE(Applying)  
Wire range (线径): 26-10AWG 0.2-4mm<sup>2</sup> 6mm<sup>2</sup> Sol  
Screw (螺丝): M3

TS & TK SERIES - Din Rail Terminal Block



**TK6-TN-PE**  
 Thickness (厚度): 8.20mm  
 Approval (认证): UL(Applying) VDE(Applying)  
 Wire range (线径): 24-8AWG 0.2-6mm<sup>2</sup> 10mm<sup>2</sup> Sol  
 Scerw (螺丝): M4



**TK10-TN-PE**  
 Thickness (厚度): 10.20mm  
 Approval (认证): UL(Applying) VDE(Applying)  
 Wire range (线径): 20-6AWG 0.5-10mm<sup>2</sup> 16mm<sup>2</sup> Sol  
 Scerw (螺丝): M4



**TKC2.5-4-TN**  
 Applicable product (适用产品)  
 TK2.5-TN, TK2.5-TN-PE  
 TK4-TN, TK4-TN-PE



**TKC10-TN**  
 Applicable product (适用产品)  
 TK6-TN, TK6-TN-PE  
 TK10-TN, TK10-TN-PE



**TK2.5-QT**  
 Thickness (厚度): 5.20mm  
 Approval (认证): UL(Applying) VDE(Applying)  
 Rated voltage (电压): 600V 1000V  
 Rated current (电流): 20A 24A  
 Wire range (线径): 26-12AWG 0.2-2.5mm<sup>2</sup> 4mm<sup>2</sup> Sol  
 Scerw (螺丝): M3



**TK4-QT**  
 Thickness (厚度): 6.20mm  
 Approval (认证): UL(Applying) VDE(Applying)  
 Rated voltage (电压): 600V 1000V  
 Rated current (电流): 30A 32A  
 Wire range (线径): 26-10AWG 0.2-4mm<sup>2</sup> 6mm<sup>2</sup> Sol  
 Scerw (螺丝): M3



**TK2.5-QT-PE**  
 Thickness (厚度): 5.20mm  
 Approval (认证): UL(Applying) VDE(Applying)  
 Wire range (线径): 26-12AWG 0.2-2.5mm<sup>2</sup> 4mm<sup>2</sup> Sol  
 Scerw (螺丝): M3



**TK4-QT-PE**  
 Thickness (厚度): 6.20mm  
 Approval (认证): UL(Applying) VDE(Applying)  
 Wire range (线径): 26-10AWG 0.2-4mm<sup>2</sup> 6mm<sup>2</sup> Sol  
 Scerw (螺丝): M3



**TKC2.5-4-QT**  
 Applicable product (适用产品)  
 TK2.5-QT, TK2.5-QT-PE  
 TK4-QT, TK4-QT-PE



**TK2.5-2L**  
 Thickness (厚度): 5.20mm  
 Approval (认证): UL(Applying) VDE(Applying)  
 Rated voltage (电压): 600V 800V  
 Rated current (电流): 20A 24A/28A(4mm<sup>2</sup>)  
 Wire range (线径): 26-12AWG 0.2-2.5mm<sup>2</sup> 4mm<sup>2</sup> Sol  
 Scerw (螺丝): M3



**TK4-2L**  
 Thickness (厚度): 6.20mm  
 Approval (认证): UL(Applying) VDE(Applying)  
 Rated voltage (电压): 600V 1000V  
 Rated current (电流): 30A 32A  
 Wire range (线径): 26-10AWG 0.2-4mm<sup>2</sup> 6mm<sup>2</sup> Sol  
 Scerw (螺丝): M3



**TK2.5-2L-PV**  
 Thickness (厚度): 5.20mm  
 Approval (认证): UL(Applying) VDE(Applying)  
 Rated voltage (电压): 600V 800V  
 Rated current (电流): 20A 24A/28A(4mm<sup>2</sup>)  
 Wire range (线径): 26-12AWG 0.2-2.5mm<sup>2</sup> 4mm<sup>2</sup> Sol  
 Scerw (螺丝): M3



**TK4-2L-PV**  
 Thickness (厚度): 6.20mm  
 Approval (认证): UL(Applying) VDE(Applying)  
 Rated voltage (电压): 600V 1000V  
 Rated current (电流): 30A 32A  
 Wire range (线径): 26-10AWG 0.2-4mm<sup>2</sup> 6mm<sup>2</sup> Sol  
 Scerw (螺丝): M3



**TKC2.5-4-2L**  
 Applicable product (适用产品)  
 TK2.5-2L, TK2.5-2L-PE  
 TK4-2L, TK4-2L-PE



**ETNS02**  
 Thickness (厚度): 8.00mm  
 Scerw (螺丝): M3  
 Applicable Din Rail (适用的导轨)  
 TH35-7.5, TH35-15



**TSFB1.5**  
 Pitch (间距): 3.50mm  
 Applicable product (适用产品)  
 TS1.5 Series



**TSFB6**  
 Pitch (间距): 8.20mm  
 Applicable product (适用产品)  
 TS6 Series



**TSFB10**  
 Pitch (间距): 10.20mm  
 Applicable product (适用产品)  
 TS10 Series



**TSFB16**  
 Pitch (间距): 12.20mm  
 Applicable product (适用产品)  
 TS16 Series

TS & TK SERIES - Din Rail Terminal Block



**TKFB2.5**  
 Pitch (间距): 5.20mm  
 Applicable product (适用产品)  
 TK2.5 Series  
 TS2.5 Series



**TKFB4**  
 Pitch (间距): 6.20mm  
 Applicable product (适用产品)  
 TK4 Series  
 TS4 Series



**TKFB6**  
 Pitch (间距): 8.20mm  
 Applicable product (适用产品)  
 TK6 Series



**TKFB10**  
 Pitch (间距): 10.20mm  
 Applicable product (适用产品)  
 TK10 Series



**TKFB16**  
 Pitch (间距): 12.20mm  
 Applicable product (适用产品)  
 TK16 Series



**TKFB35**  
 Pitch (间距): 16.00mm  
 Applicable product (适用产品)  
 TK35 Series



**MARK1.5DB-M**  
 Pitch (间距): 3.50mm  
 Applicable product (适用产品)  
 TS1.5 Series



**MARK2.5DB-M**  
 Pitch (间距): 5.20mm  
 Applicable product (适用产品)  
 TK2.5 Series  
 TS2.5 Series



**MARK4DB-M**  
 Pitch (间距): 6.20mm  
 Applicable product (适用产品)  
 TK4 Series  
 TS4 Series



**MARK6DB-M**  
 Pitch (间距): 8.20mm  
 Applicable product (适用产品)  
 TK6 Series  
 TS6 Series



**MARK10DB-M**  
 Pitch (间距): 10.20mm  
 Applicable product (适用产品)  
 TK10 Series  
 TS10 Series




**MARK16DB-M**  
 Pitch (间距): 12.20mm  
 Applicable product (适用产品)  
 TK16 Series  
 TS16 Series




**MARK35DB-M**  
 Pitch (间距): 16.00mm  
 Applicable product (适用产品)  
 TK35 Series




**MARK1.5DB-S**  
 Pitch (间距): 3.50mm  
 Applicable product (适用产品)  
 TS1.5 Series




**MARK2.5DB-S**  
 Pitch (间距): 5.20mm  
 Applicable product (适用产品)  
 TS2.5 Series



**MARK4DB-S**  
 Pitch (间距): 6.20mm  
 Applicable product (适用产品)  
 TS4 Series



**MARK6DB-S**  
 Pitch (间距): 8.20mm  
 Applicable product (适用产品)  
 TS6 Series




**MARK10DB-S**  
 Pitch (间距): 10.20mm  
 Applicable product (适用产品)  
 TS10 Series



**MARK16DB-S**  
 Pitch (间距): 12.20mm  
 Applicable product (适用产品)  
 TS16 Series




**THC35**  
 Applicable Din Rail(适用的导轨)  
 TH35-7.5




**TEM009-01**

Material (材质):	Brass
Plated (镀层):	Tin




**TEM015-01**

Material (材质):	Brass
Plated (镀层):	Tin




**TEM017-01**

Material (材质):	Brass
Plated (镀层):	Tin




**TEM018-01**

Material (材质):	Brass
Plated (镀层):	Tin




**TEM019-01**

Material (材质):	Brass
Plated (镀层):	Tin




**TEM019-02**

Material (材质):	Brass
Plated (镀层):	Tin




**TEM019-03**

Material (材质):	Brass
Plated (镀层):	Tin




**TEM020-01**

Material (材质):	Brass
Plated (镀层):	Tin




**TQM002-6.3-A**

Material (材质):	Brass
Plated (镀层):	Tin




**TEM031-01**

Material (材质):	Solder Pin: Brass
	Rivet Nut: Stainless
	Screw: Steel
Plated (镀层):	Solder Pin: Tin
	Screw: Zn-Ni




**SA-0002(A125)**

Material (材质):	Solder Pin: Brass
	Nut: Steel
Plated (镀层):	Solder Pin: Tin
	Nut: Zn-Ni/Tin(A125)



**SA-0003(A125)**

Material (材质):	Solder Pin: Brass
	Nut: Steel
Plated (镀层):	Solder Pin: Tin
	Nut: Zn-Ni/Tin(A125)



**SA0004**

Material (材质):	Solder Pin: Brass
	Screw: Steel
Plated (镀层):	Solder Pin: Tin
	Screw: Zn-Ni

## Customized products

At Tianli, we are continually developing various kinds of products to provide more choices for our customers.

Tianli can also offer the manufacture of special products according to a customer's own design. We have a large Design Department, equipped with the latest design aids, and we also have our own assembly and moulding machinery in-house. Based on these, we can maximumly reduce our development cost.

Because we deem quality as the most important service we can offer to our customers, both the present and future clients can be assured of complete satisfaction.







# **TIELEE<sup>®</sup> 天立电机**

**Tianli Electrical Machinery (Ningbo) Co., Ltd**

## **天立电机（宁波）有限公司**

地址：中国浙江省宁波杭州湾新区庵东工业园区纬三路 138 号

邮编：315327

国内销售：

电话：0574-6347-9600,6347-9618

传真：0574-6389-7084, 6347-9611

Web: [www.tielee.com](http://www.tielee.com)

## **深圳办事处**

地址：深圳市宝安区松岗街道联投东方 PARK 9 座 25C

电话：0755-8612-9295

传真：0755-8612-9295

Web: [www.tielee.com](http://www.tielee.com)

## **Tianli Electrical Machinery (Ningbo) Co., Ltd**

ADD: 138, Weisan Rd., Andong Development Zone, Hangzhou BayArea,  
Ningbo, Zhejiang, 315327 China

Export Department:

TEL: +86-574-6347-9600, 6389-6436

FAX: +86-574-6389-7084, 6347-9611

Web: [www.tielee.com](http://www.tielee.com)

## **Shenzhen Office**

ADD: 25C, Building A, Liantou East Park, Songgang Street,  
Baoan District, Shenzhen, China

TEL:+86-755-8612-9295

FAX:+86-755-8612-9295

Web: [www.tielee.com](http://www.tielee.com)